




Brochure 2023





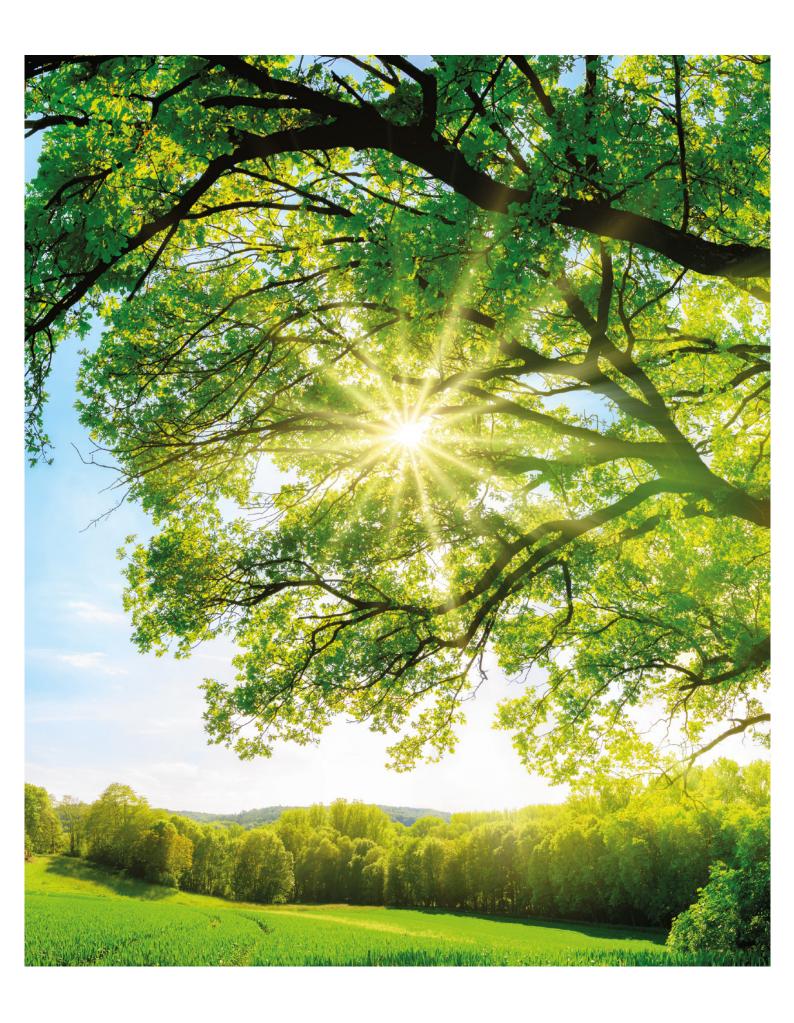



FC003 NATURAL OAK (TIMB)


















FC048 ASSOS OAK (TIMB)


















FC055 ASH OAK (TIMB)
















FC056 MEDITERRANEAN PINE (TIMB)


















FC062 ATLAS (TIMB)


















FC066 ALASKA OAK (TIMB)


















FC070 FINIKE (TIMB)


















FC071 DATÇA (TIMB)


















FC073 GÖKOVA (TIMB)


















FC074 CORPUS OAK (TIMB)

















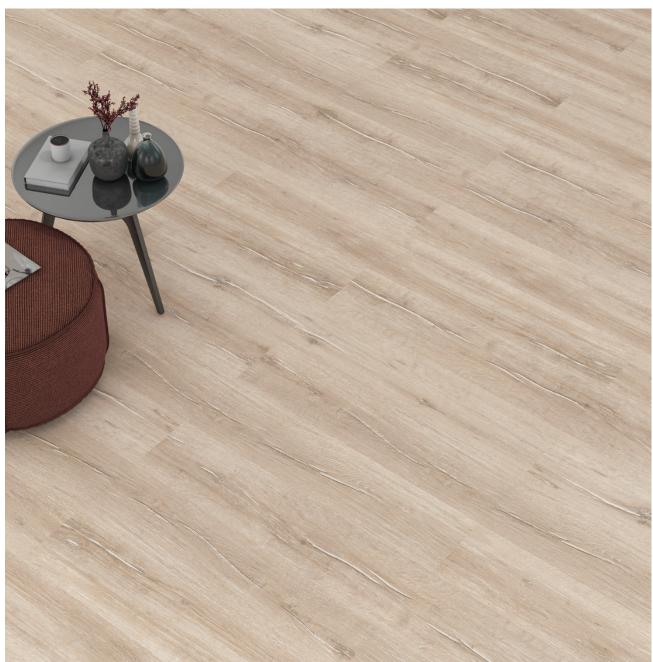

FC081 GENOVA (TIMB)


















FC084 JAWA (TIMB)

AC4 8 mm

193 mm
197 mm

















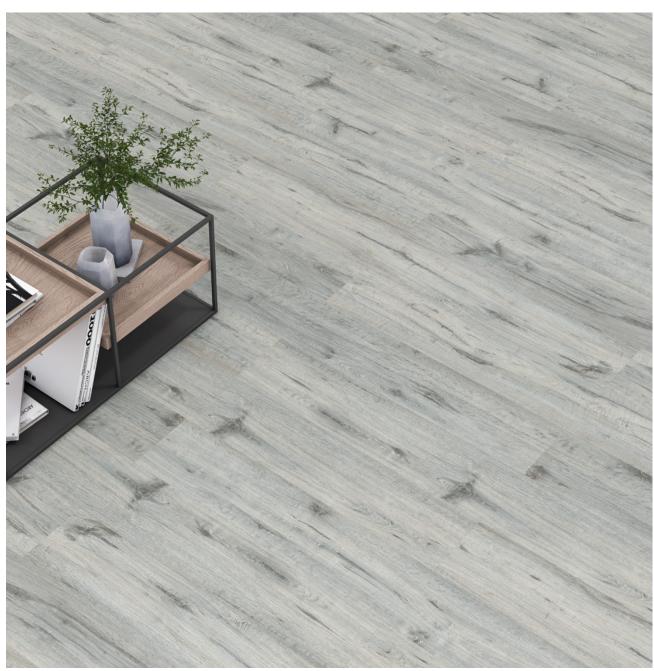

FC085 AVŞA (TIMB)

















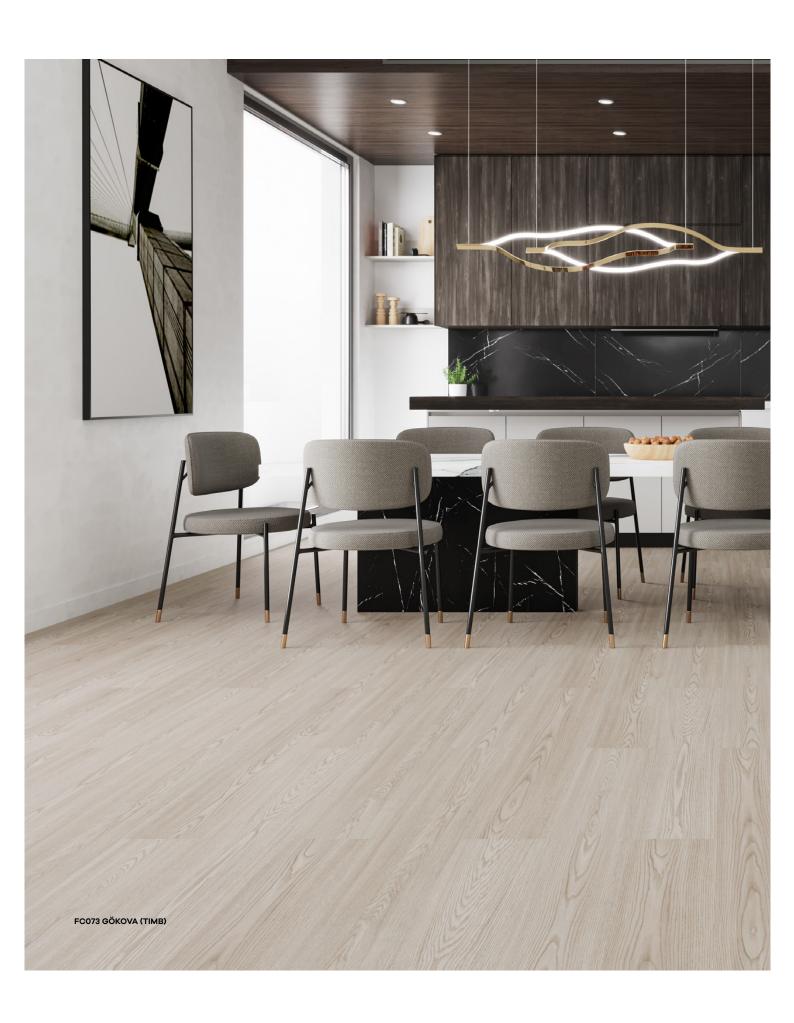

FLOORPAN

The Advantages of Laminate Flooring



FAST AND EASY ASSEMBLY





SUITABLE FOR UNDERFLOOR HEATING











BASE PANEL, HIGH DENSITY FIBERBOARD










1295 mm



1205 mm





01 - OVERLAYHIGH QUALITY SURFACE PROTECTION RESISTANT TO WEAR AND SCRATCH

02 - DECOR PAPERREFLECTING THE CHARACTERISTICS OF THE PRODUCT WITH A UNIQUE DESIGN

 ${\bf 03 - HDF} \\ {\bf STRONG BASE PANEL, RESISTANT TO HIGH PRESSURE PRODUCED AS PER E1 NORM}$

04 - BALANCE PAPERPROTECTS AGAINST HUMIDITY AND DISTORTION

Laminate Flooring Classification

CLASS	21	22	23	31	32	33	34
UTILIZATION	AC1	AC2	AC3		AC4	AC5	AC6
ABRASION RESISTANCE	≥ 500	≥ 1000	≥ 2000		≥ 4000	≥ 6000	≥ 8500
RESISTANCE TO STAINS	Min. 4 (group 1 and 2) Min. 3 (group 3)		Min. 5 (group 1 and 2) Min. 4 (group 3)		Min. 5 (group 1, 2, 3)		

bridging nature and life









