

Product Catalogue

COLLECTIONS FOR PROFESSIONALS

2022–2023

Combine
floors, walls
and accessories
to create your
space

TABLE OF CONTENTS

4	INTRODUCTION
4	Tarkett solutions
6	Tarkett Human-Conscious Design®
8	Conscious choices. For people and the planet.
10	Our 2030 climate roadmap
12	Ecodesigning with circularity in mind
14	ReStart®
16	CARPET TILES
18	DESSO SoundMaster®
20	DESSO AirMaster®
22	AirMaster® Gold Collection
26	AirMaster® Concept
28	AirMaster®
32	AirMaster® Atmos
34	AirMaster® Earth
36	AirMaster® Savera
38	AirMaster® Savera Shade
40	AirMaster® Sphere
42	AirMaster® Tones
44	Desert AirMaster®
46	Arable
48	Arcade
50	Breccia
52	Carved
54	Desert
56	Essence Collection
62	Fields, Fuse & Fuse Create
66	Flores
68	Forto
70	Futurity
72	Grain
74	Granite
76	Grezzo

78	Iconic
80	Jeans Collection
82	Linon
84	Lita
86	Marvel
88	Metallic Shades
90	Mode Collection
96	Natural Nuances
98	Orchard
100	Palatino
104	Protect
106	Reclaim Ribs II
108	Rock
110	Salt
112	Serene
114	Serene Colour
116	Stitch
118	Stratos Collection
122	Temptra
126	Torso
130	Traverse
132	Verso
134	Wave

136	BROADLOOM & RUGS
138	Axminster
140	Axminster Sculpt
142	Denim Collection
144	Desso &Ex
146	Desso &Ex Nature
148	Essence
150	Palatino
152	Patterns & Shades
154	Torso
156	Sense of Marble
158	Vintage

160	HOMOGENEOUS
162	Product Overview
VINYL HEAVY TRAFFIC	
IQ	
166	iQ One
170	iQ Natural
174	iQ Surface
178	iQ Megalit
182	iQ Eminent & iQ Granit
190	iQ Optima
PREMIUM	
196	Primo Premium
200	Eclipse Premium
PLUS	
208	Contract Plus
210	Standard Plus
214	Vylon Plus
218	HETEROGENEOUS
222	Product Overview
VINYL HEAVY TRAFFIC	
COMMERCIAL HE LOOSE-LAY	
226	Tapiflex & Acczent Excellence Genius
COMMERCIAL HE GLUE-DOWN	
230	Tapiflex & Acczent Platinum
236	Tapiflex & Acczent Excellence
248	Tapiflex & Acczent Essential
SEMI-COMMERCIAL TO COMMERCIAL HE GLUE-DOWN	
254	Topaz 70
258	Ruby 70
262	Meteor 70
264	Meteor 55
266	Classic 40
VINYL LIGHT TRAFFIC	
COLLECTIVE HOUSING GLUE-DOWN	
274	TX Habitat
280	TX Classic
284	TX Modulaire
COLLECTIVE HOUSING LOOSE-LAY	
288	TX Habitat Genius
292	Nordic Stabi

296 LUXURY VINYL TILES

298	Product Overview
	HIGH & MODERATE TRAFFIC
	LVT GLUE-DOWN
304	iD Mixonomi
310	iD Inspiration 55 & High Traffic 70
	LVT CLICK
322	iD Click Ultimate 55 & 70
	iD Inspiration Click Solid 55
328	iD Inspiration Click High Traffic 70
	LVT LOOSE-LAY
336	iD Inspiration Loose Lay
340	iD TILT
	LVT LOOSE-LAY ACOUSTIC
342	iD Square
	LIGHT TRAFFIC
	LVT GLUE-DOWN
348	iD Inspiration 30
	LVT CLICK
354	iD Inspiration Click Solid 30

358 LINOLEUM

360	Product overview
	LINOLEUM xf²™
364	Veneto xf ²
370	Style Elle xf ²
372	Style Emme xf ²
376	Trentino xf ²
378	Etrusco xf ²
380	Originale xf ²
	LINOLEUM ESSENZA+
384	Originale Essenza+
386	Veneto Essenza+

390 WOOD

392	Product Overview
396	Noble
398	Prestige
400	Heritage
402	Segno
406	Shade
410	Pure
414	Viva
	PROFESSIONAL
418	Professional 22
418	Professional 14
418	Professional 13
419	Professional 10

422 SPECIFIC SOLUTIONS

426	Product Overview
	WETROOM CONCEPT
	FLOOR COVERINGS
430	Granit Multisafe
432	iQ Optima 1.5 mm
434	Multisafe Aqua
436	Aquarelle Floor
440	Aquarelle XL Floor
	WALL COVERINGS
444	Aquarelle Wall HFS
446	Aquarelle Wall
450	Aquarelle Wall Borders
	WALL PROTECTIONS
456	Wallgard
458	ProtectWALL 2 CR
460	ProtectWALL 1.5 mm
464	LinoWall
	STATIC CONTROL
	HOMOGENEOUS VINYL
472	iQ Toro SC
474	iQ Granit SD
476	Primo SD
	LINOLEUM
478	Linoleum SD Static Dissipative xf ² ™
480	Linoleum Conductive xf ² ™
	SAFETY
	HOMOGENEOUS VINYL
488	Granit Safe.T
490	Primo Safe.T
	HETEROGENEOUS VINYL
494	Safetred Design
498	Safetred Ion
502	Safetred Spectrum
504	Safetred Universal
506	Safetred Universal Plus (R11)
510	Transport Safetred
512	Transport Exclusive
	STAIRS & ACCESSIBILITY
520	Tapiflex Stairs & Stairs Self-Adhesive

INDOOR SPORTS

526	10 things to consider
528	Introduction to standards
530	Product Overview
	VINYL SPORTS SOLUTIONS
534	Omnisports Compact, Speed & Training
	Omnisports Reference
538	Multi-Use, Active & Pureplay
542	Omnisports Specialties
	WOOD SPORTS SOLUTIONS
	S'MATCH-IT
546	Proflex M
547	Flexlock
548	Multiflex M
549	Reflex M Evolution
	COMBINED SPORTS SOLUTIONS
	LUMAFLEX
552	Lumaflex Extreme
554	Lumaflex Evolution
556	Lumaflex Energy
	FLOOR PROTECTION
	DROPZONE & DROPTILE
558	Dropzone
558	Droptile
	PROTECTION
562	ProtecTiles+
563	Touch down

566 ACCESSORIES

	ACCESSORIES FOR RESILIENT FLOORINGS
594	FLOORCRAFT
598	ACCESSORIES FOR HARD FLOORINGS
602	ACCESSORIES FOR SPORTS FLOORINGS
608	ACCESSORIES FOR ALL TYPES OF FLOORINGS

610 TECHNICAL FOLDER

610	Installation Instructions for Resilient Floorings
628	Installation Instructions for Hard Floorings
632	Installation Instructions for Carpet Tiles
636	Cleaning Recommendations for Resilient Floorings
646	Cleaning Recommendations for Hard Floorings - Wood

648 PICTOGRAMS GLOSSARY




A world leader in flooring and sports surface solutions





We strive to offer our customers our expertise and appropriate solutions, thanks to one of the largest portfolio of flooring and sports surface solutions, to make their project a success.

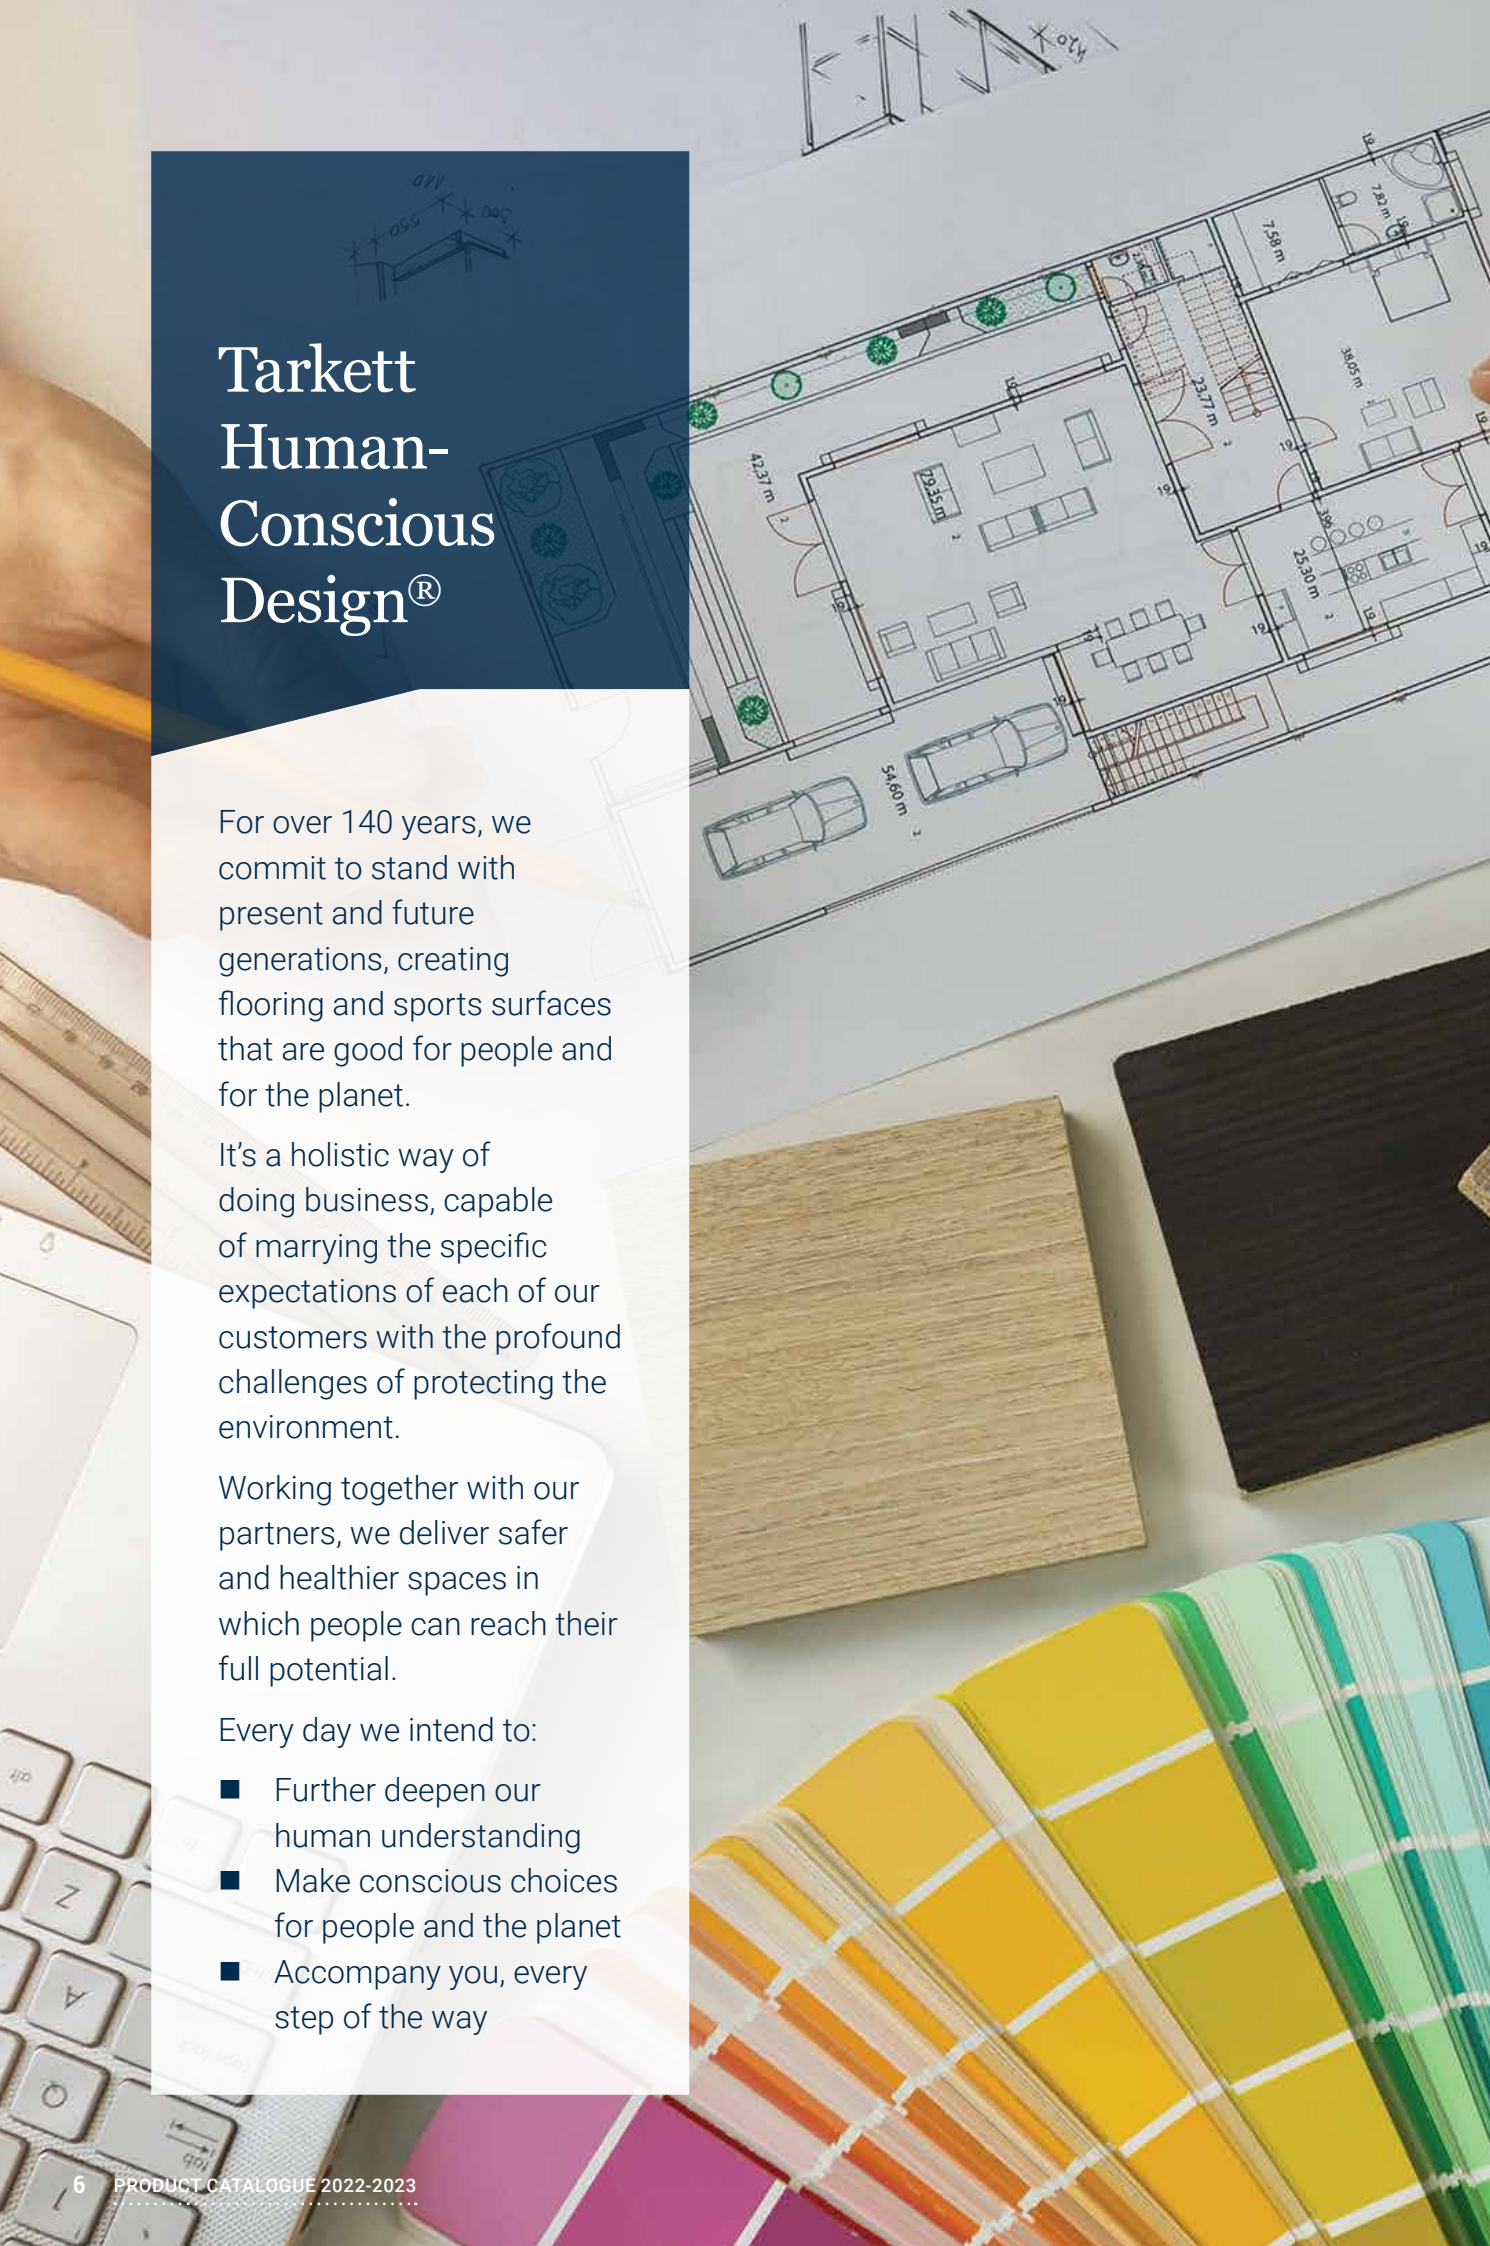

The background of the page is a collage of design-related images. It includes a technical architectural floor plan with various rooms, dimensions, and furniture layouts. There are also close-up shots of a wooden ruler, a yellow pencil, and a laptop keyboard. In the bottom right corner, there is a stack of color swatches in various shades of yellow, orange, and green. The overall theme is architectural and design-oriented.

Tarkett Human- Conscious Design®

For over 140 years, we commit to stand with present and future generations, creating flooring and sports surfaces that are good for people and for the planet.

It's a holistic way of doing business, capable of marrying the specific expectations of each of our customers with the profound challenges of protecting the environment.

Working together with our partners, we deliver safer and healthier spaces in which people can reach their full potential.

Every day we intend to:

- Further deepen our human understanding
- Make conscious choices for people and the planet
- Accompany you, every step of the way





Conscious
choices.
For people and
the planet.

The world is facing increasingly complex sustainability challenges. Making conscious choices, has never been more important.

When it comes to people and the planet, we don't consider one without the other. We commit every day to the design of great spaces. For us, this means exceeding indoor air quality standards, instituting healthy material norms, reducing our carbon footprint and creating a Circular Economy supported by Cradle to Cradle® principles. Doing better, for people and planet.

Embedding sustainability in everything we do



Climate and circular economy

Helping you lower your emissions and reduce your waste.

We are committed to a circular economy to tackle climate change. We work with our customers to take back and recycle flooring through our ReStart® take-back and recycling programme. Tarkett is the only flooring manufacturer to master closed-loop recycling for used carpets, linoleum and vinyl flooring.*


*Post-2011 homogeneous flooring, loose-lay heterogeneous flooring, click modular vinyl tiles and iD Square.



Good materials

Giving you total transparency on the materials we use for your total peace of mind.

We only use good materials, including recycled content. Cradle to Cradle® – is the methodology that guides our good material choices. 97% of our materials are Cradle to Cradle® assessed. We also believe in giving you unrivalled information on the health and environmental impact of all our products, through our Material Health Statement (MHS) and Environmental Product Declarations (EPD).



Indoor Air Quality

Giving you healthier spaces to live and work is our commitment, not just talk.

By capturing fine dust and driving down Volatile Organic Components (VOC) emissions, our products exceed the strictest industry standards for air quality by so much, we've had to set our own standards. Standards that we can prove with science, not just words. It means you can breathe easy, knowing you made a good choice for your flooring.

We go the extra
mile to cut
carbon emissions.
Join us!

-30%


CO₂ emissions
throughout our value chain
(vs 2019)

Our 2030
climate roadmap


Slashing carbon throughout our value chain

Our climate ambitions support the goals of the Paris Climate Agreement and the UN's 2030 targets. We are taking steps to reduce greenhouse gas emissions across our whole value chain – this includes emissions from our suppliers and customers

Understanding greenhouse gas emissions and scopes 1, 2 and 3

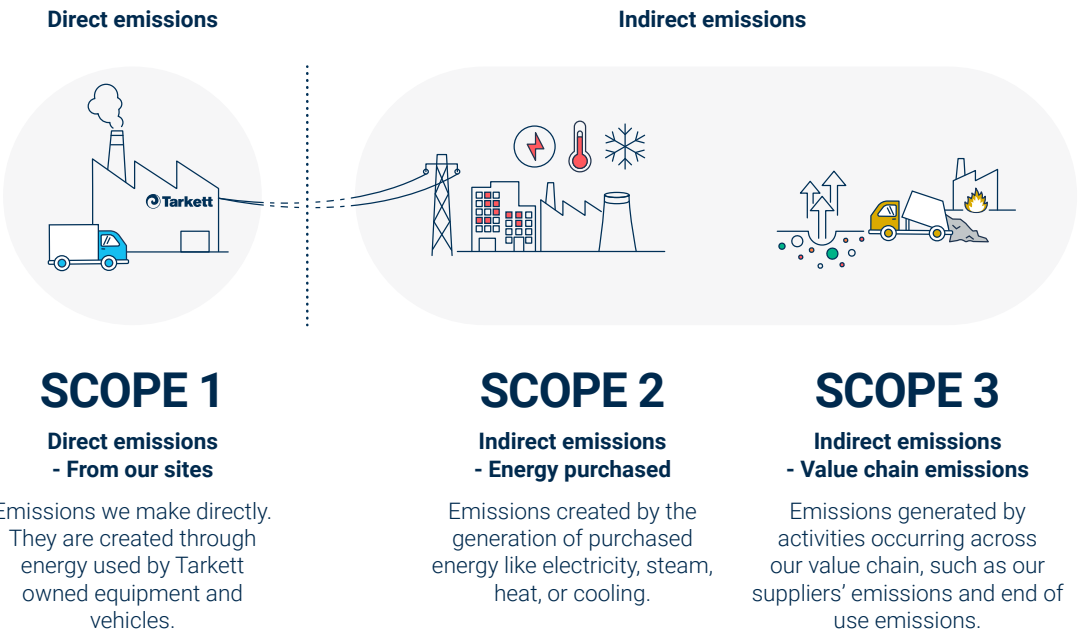

Our climate action accelerates

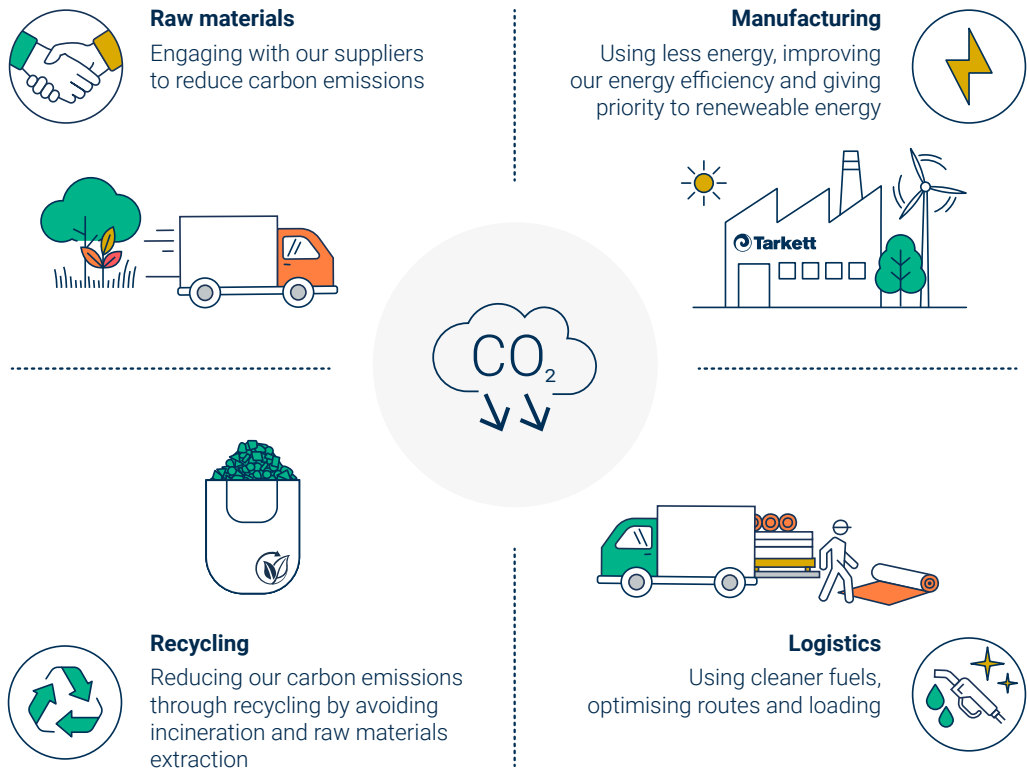



We aim to reach
30% of recycled
content in our
products by 2030

30% | recycled
content

Ecodesigning with
circularity in mind

Making good material choices

Claiming to use good materials is one thing. Proving you do is another.

We eco-design our products according to Cradle to Cradle® principles, a methodology that guides us in our good materials choices – including recycled content.

97% of our raw materials (over 5,000) are third-party assessed according to Cradle to Cradle® principles.



97% MATERIALS ASSESSED



RECYCLABLE

Pioneering end-of-use recycling


By choosing a Tarkett flooring solution, you're choosing a company with a proven track record of trailblazing innovative recycling solutions for both installation waste and old floors.

Recycling flooring not only conserves the world's natural resources, but helps to tackle climate change by cutting out the energy and water needed to extract and process virgin materials and the GHG emissions from incineration. It is a decisive contributor to our journey towards a carbon neutral world.

Making your flooring choice easy

Your quest for circular flooring can be complex and confusing, and sometimes you just don't have all the information you need.

At Tarkett, we want to help you make informed choices. Tarkett's Circular Selection is a collection of flooring that's designed with circularity and end of life recycling in mind. The circular selection includes several collections across different product categories from carpets, linoleum and vinyl flooring.



You have the will to recycle. We have the way.

Wondering what to do with the installation waste or old floors from your project?

Join ReStart® and rest assured your flooring will be collected and recycled. We are the only flooring manufacturer to master closed-loop recycling for old carpets, linoleum and vinyl flooring.* Turning old floors into new ones while maintaining the same level of quality and performances.


*Post-2011 homogeneous flooring, loose-lay heterogeneous flooring, click modular vinyl tiles and iD Square.

How do we recycle?

Your flooring waste will be collected post-installation or post-use by a trusted local partner and sent to one of our 8 recycling centres to be recycled and transformed into high quality raw materials to create new Tarkett products. Recycling methods vary from one product category to another and is more challenging when it comes to old floors as they are often covered in glue and bits of concrete.

Join us in our journey towards a carbon neutral world.

Join Restart® and leave the rest to us

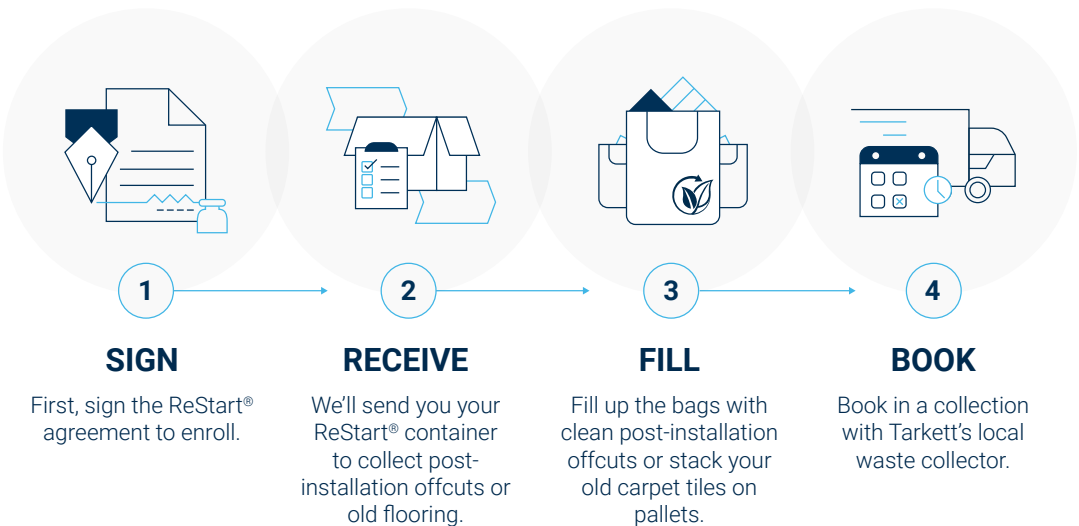

Terms of registration can vary from one country to the other. Contact your local Tarkett sales offices to find out how to register for ReStart® in your country.



Luxury Vinyl Tiles

HIGH & MODERATE TRAFFIC

LVT GLUE-DOWN

- 304 iD Mixonomi
- 310 iD Inspiration 55 & High Traffic 70

LVT CLICK

- 322 iD Click Ultimate 55 & 70
- 328 iD Inspiration Click Solid 55
iD Inspiration Click High Traffic 70

LVT LOOSE-LAY

- 336 iD Inspiration Loose Lay
- 340 iD TILT

LVT LOOSE-LAY ACOUSTIC

- 342 iD Square

LIGHT TRAFFIC

LVT GLUE-DOWN


- 348 iD Inspiration 30

LVT CLICK

- 354 iD Inspiration Click Solid 30



LUXURY VINYL TILES

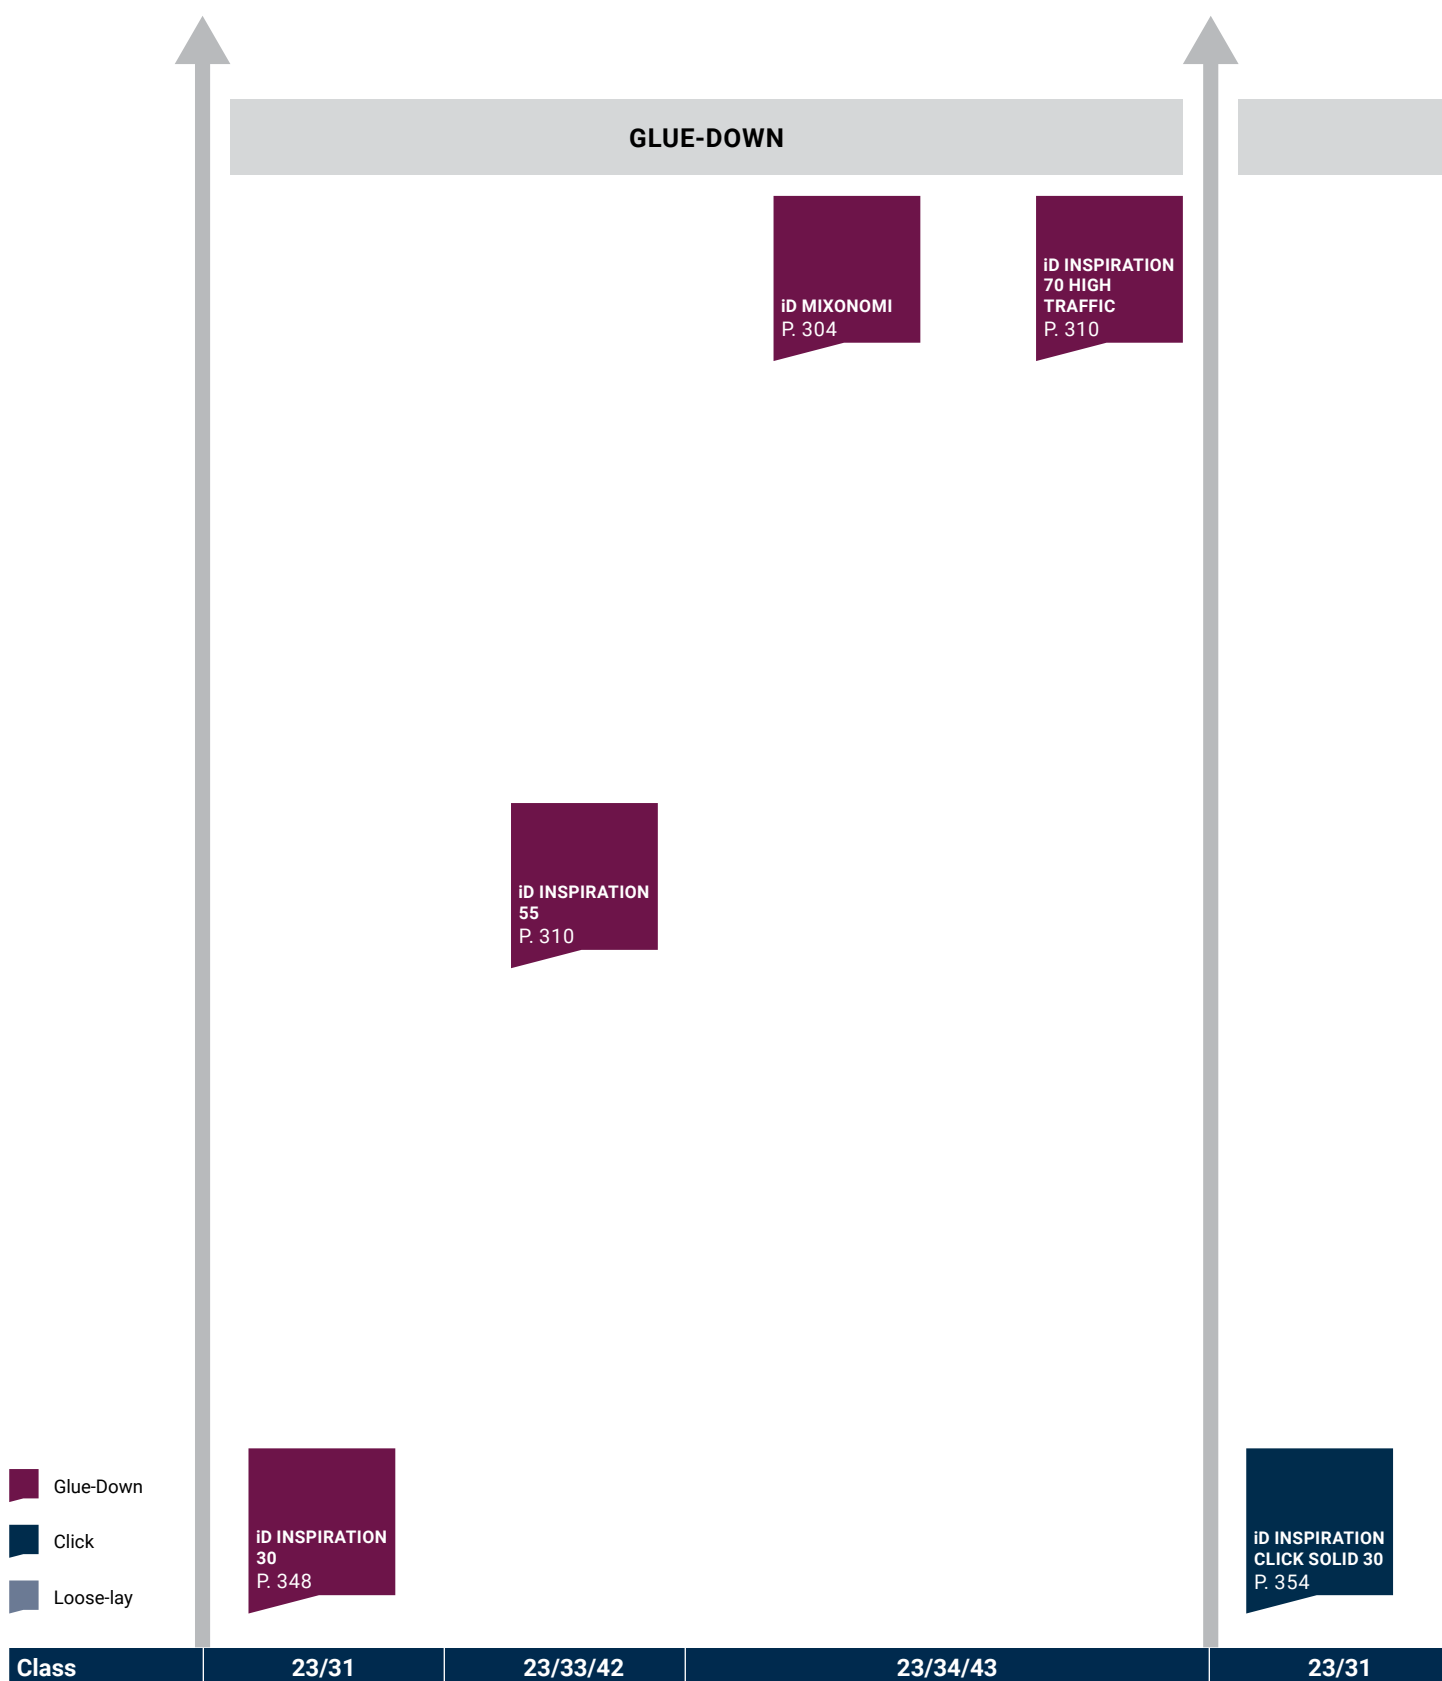

CLICK

iD CLICK
ULTIMATE 70
P. 322

iD INSPIRATION
CLICK 70 HIGH
TRAFFIC
P. 328

iD CLICK
ULTIMATE 55
P. 322

iD INSPIRATION
CLICK SOLID 55
P. 328

LOOSE LAY

iD TILT
P. 340

iD SQUARE
P. 342

iD INSPIRATION
LOOSE LAY
P. 336

LVT

23/33

23/34

33/42

34/43

34


42/43 in iD Click Ultimate on demand only



A premium LVT glue-down collection for all commercial areas, iD Inspiration distinctive and fully customisable designs are particularly suited for retail, hospitality and workplace

SENSORIAL BENEFITS

- Coordinated colours and designs for over 75 000 potential combinations
- Create your own personalised flooring with Tarkett's customisation concept

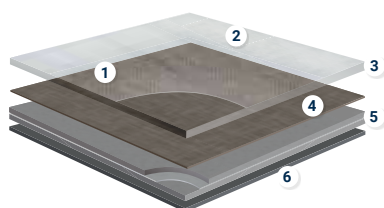


iD INSPIRATION 55

- 1 **Surface embossing & textures:**
close to real materials
- 2 **TEKTANIUM PU coating:**
ultra matity and unequalled resistance
- 3 **0,55 mm pure PVC transparent wear layer:**
exceptionally hard-wearing and indentation resistant
- 4 **100 design options in high definition printing:**
with great customisation possibilities
- 5 **Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre:**
exceptional dimensional stability and excellent resistance to tear and indentation
- 6 **PVC backing**

FUNCTIONAL BENEFITS

- Great dimensional stability
- Save time and money with easy maintenance
- Unequalled resistance and ultra matity
- All designs available in 0.55 mm and 0,70 mm High Traffic wear layers

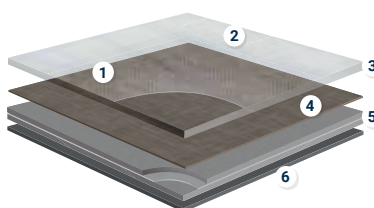


iD INSPIRATION 70 HIGH TRAFFIC

- 1 **Surface embossing & textures:**
close to real materials
- 2 **TEKTANIUM PU coating:**
ultra matity and unequalled resistance
- 3 **0.70 mm pure PVC transparent wear layer:**
exceptionally hard-wearing and indentation resistant
- 4 **100 design options in high definition printing:**
realistic designs
- 5 **Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre:**
exceptional dimensional stability and excellent resistance to tear and indentation
- 6 **PVC backing**

ENVIRONMENTAL BENEFITS

- 100% recyclable
- 100% phthalate-free
- Ultra low VOC (<10 µg/m³)
- 39,5% recycled content
- EPD and MHS available

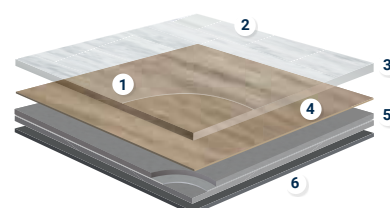


iD INSPIRATION 30

- 1 **Surface embossing & textures:**
close to real materials
- 2 **TEKTANIUM PU coating:**
ultra matity and unequalled resistance
- 3 **0,30 mm pure PVC transparent wear layer:**
hard-wearing and indentation resistant
- 4 **50 design options in high definition printing:**
realistic designs
- 5 **Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre:**
exceptional dimensional stability and excellent resistance to tear and indentation
- 6 **PVC backing**


TEKTANIUM

Best ultra matt finish and unequalled resistance


The iD Inspiration collection features our new TEKTANIUM PU coating which uses a proprietary polymer system – forming a naturally clear, verifiably stronger layer of protection that delivers unequalled resistance to scratches, abrasions, wear and stains. Moreover, it offers a pure ultra matt finish, which is consistently visible from all angles. By mixing ultra matt effect with excellent resistance and durability properties, the surface of your flooring appears more realistic and lasts longer. TEKTANIUM is the only PU coating to combine all these features, so there's no need for compromise.

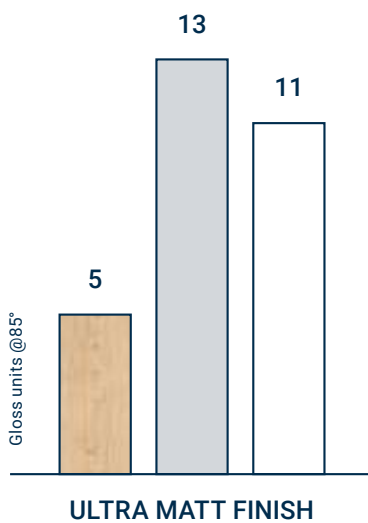

Gloss measurement at an 85° angle based on Tarkett's internal tests. (in compliance with ISO 2813)
 < 6 = Ultra matt
 > 10 = Satin

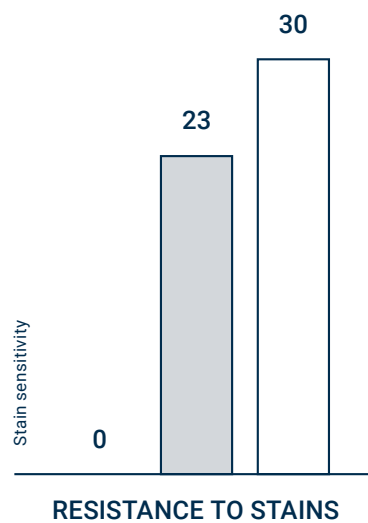

Stain resistance measurement based on Tarkett's internal tests (in compliance with ISO 26987).
 0 = not affected (Best in class)
 30 = very affected

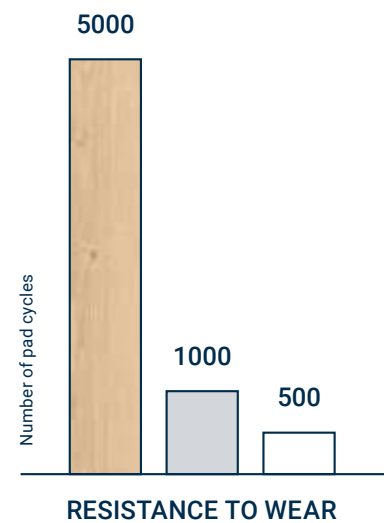

Wear resistance measurement based on Tarkett's internal tests. (based on EN ISO 16094)
 5000 = best in class

- Tarkett: iD Inspiration
- Key european competitor A
- Key european competitor B



Durable, waterproof, simple to maintain and with versatile designs worthy of the most demanding brands and customers, Tarkett design-rich solution leverages Tarkett more than 130 years of flooring and innovation experience and provides the very best in flooring today.

SENSORIAL BENEFITS

- 73 wood and stone designs, coming from iD Inspiration Click Solid, iD Click Ultimate and using our embossing in register technology in a selection of designs
- High-end commercial designs inspired by the most trendy environment, crafted in our Design Center in Europe
- Wide variety of premium accessories including skirtings to match every design

FUNCTIONAL BENEFITS

- Fold-down click system: 30% quicker to install than glue-down products
- Great dimensional stability
- Tektanium PU coating with ultra matity and unequalled resistance
- Enhanced acoustic performance when installed with Tarfomfort Pro or Tarkomfort Premium underlayers
- Patented 0,70 iD Inspiration Click construction to support high traffic

ENVIRONMENTAL BENEFITS

- 100% recyclable
- 100% phthalate-free
- Low VOC
- Made in European Union
- EPD and MHS Available

INTRODUCING RIGID COMPOSITE CORE(RCC) TECHNOLOGY

- Extra density RCC technology (wear-proof, stain-proof, heat-proof, waterproof):
 - Ultimate resistance (perfect solution for heavy traffic and heavy loads up to 800 kg)
 - Ultimate acoustic comfort (19 dB acoustic absorption)
 - Ultimate installation (covering 400 sqm without expansion gap)
 - Ultimate design (Embossing In Register / High definition printing)
- Innovative new I4F triple lock and click system

TECHNICAL OVERVIEW

	Standards	iD Click Ultimate 70	iD Click Ultimate 55	iD Click Ultimate 70 ^{PLUS}	iD Click Ultimate 55 ^{PLUS}	iD Inspiration Click Solid 55	iD Inspiration Click High Traffic 70
Certification & Classification							
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering					
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43*	Domestic: 23 Commercial: 33 Industrial: 42*	Domestic: 23 Commercial: 34	Domestic: 23 Commercial: 33	Domestic: 23 Commercial: 33 Industrial: 42	Domestic: 23 Commercial: 34 Industrial: 43
Technical Characteristics							
Total thickness	EN ISO 24346	6,50 mm	6,50 mm	6,50 mm	6,50 mm	5,00 mm	5,00 mm
Wear layer thickness	EN ISO 24340	0,70 mm	0,55 mm	0,70 mm	0,55 mm	0,55 mm	0,70 mm
Total weight	EN ISO 23997	11300 g/m²	11400 g/m²	11300 g/m²	11400 g/m²	8850 g/m²	8350 g/m²
Wear layer binder content	EN ISO 10582	Type I	Type I	Type I	Type I	Type I	Type I
Dimensions	EN ISO 24342	Plank 200,5 x 1200 mm - 5 Plank = 1,23 m²/box - 64 box/pallet Plank 243 x 1500 mm - 3 Plank = 1,09 m²/box - 69 box/pallet Tile 480 x 480 mm -5 Tile = 1,15 m²/box - 68 box/pallet Tile 243 x 486 mm - 11 Tile = 1,29 m²/box - 56 box/pallet Tile 480 x 960 mm - 3 Tile = 1,38 m²/box - 56 box/pallet		Planks 176 x 1213 mm - 6 Plank = 1,281 m²/box - 60 box/pallet		Plank 1220 x 190 mm - 7 Plank = 1,61 m²/box - 56 box/pallet Plank 240 x 1491 mm - 5 Plank = 1,79 m²/box - 51 box/pallet 276,2 x 1210 mm - 5 plank = 1,67m²/box - 54 box/pallet Tile 324 x 601 mm - 9 Tile = 1,75 m²/box - 54 box/pallet Tile 490 x 991 mm - 3 Tile = 1,46 m²/box - 62 box/pallet	
Surface treatment (PUR)	-	Yes - PUR Ultimate	Yes - PUR Ultimate	Yes - PUR Ultimate	Yes - PUR Ultimate	Yes - Tektanium	Yes - Tektanium
Bevelled edges	-	Yes	Yes	Yes	Yes	Yes	Yes
Embossing in Register	-	No	No	Yes	Yes	Yes on Authentics references	Yes on Authentics references
Technical Performance							
Dimensional stability	EN ISO 23999	0,05% Average Measured Value 0,15% Required Value				0,10% Average Measured Value 0,15% Required Value	
Curl resultant to heat	EN ISO 23999	≤ 1 mm	≤ 1 mm	≤ 1 mm	≤ 1 mm	≤ 1 mm	≤ 1 mm
Reaction to fire	EN 13501-1	B _s -s1	B _s -s1	B _s -s1	B _s -s1	B _s -s1	B _s -s1
Residual indentation	EN ISO 24343-1	0,02 mm Average Measured Value ≤0,10 mm Required Value				≤ 0,10 mm	≤ 0,10 mm
Furniture leg	EN 424	No damage					
Castor chair	EN ISO 4918 - EN 425	No damage					
Impact sound reduction	EN ISO 717-2	ΔLw = 19 dB / ΔLlin = 7 dB **ΔLw = 8 dB				ΔLw = 5 dB	ΔLw = 5 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,ew} < 85 dB)					
Thermal resistance	EN ISO 10456	0,05 m² K/W	0,05 m² K/W	0,05 m² K/W	0,05 m² K/W	0,05 m² K/W	0,05 m² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Good	Good	Good	Good	Excellent resistance	Excellent resistance
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0,30		R9/R10 Depending on embossing μ ≥ 0,30			
Peeling resistance	EN ISO 24345	≥ 50 N / 50 mm	≥ 50 N / 50 mm	≥ 50 N / 50 mm	≥ 50 N / 50 mm	≥ 50 N / 50 mm	≥ 50 N / 50 mm
Underfloor heating	-	Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C
Sustainable Performances							
VOC emission	EN 16516	≤ 10 µg/m³	≤ 10 µg/m³	≤ 100 µg/m³	≤ 100 µg/m³	≤ 10 µg/m³	≤ 10 µg/m³
Recycled content	-	up to 20%	up to 20%	up to 20%	up to 20%	up to 35%	
Recyclable	-	Yes - installation and post-consumer waste					
Plasticizer	-	Phthalate-free	Phthalate-free	Phthalate-free	Phthalate-free	Phthalate-free	Phthalate-free
Warranties							
Commercial warranty	-	10 years					
CE Marking							
DoP number	-	0197-0052-DoP-2019-08	0197-0053-DoP-2019-08	0132-0070-DoP-2018-01	0132-0070-DoP-2018-01	0197-0011-DoP-2021-02	0197-0051-DoP-2021-02


*only on references without acoustic backing
** only for references without backing

- Ultimate robustness to indentation shocks, scratch & scuff thanks to new RCC technology
- Ultimate installation minimising business close up:
 - 100 sqm installed in 8 hours thanks to quick and easy installation I4F new click system
 - Install over subfloors including ceramic tiles without preparation
 - Install longer areas without transition gap thanks to exceptional dimensional stability (400 m²)
- Ultimate design with 15 modern and stylish wood & stone designs

iD CLICK ULTIMATE 55-70 & 55-70^{PLUS}

iD CLICK ULTIMATE 55-70 & 55-70^{PLUS}

- 1 The Ultimate PUR surface treatment** is a photo-reticulated coating that is exceptionally resistant to abrasion and scratches.
- 2 A high definition decorative layer** includes lifelike embossing in register on most references.
- 3 Rigid Composite Core (RCC) technology** provides extreme dimensional resistance and stability, ensuring reliably durable performance.
- 4 The acoustic backing with Soundblock technology** absorbs 19 dB.
- 5 Installation is fast and easy** thanks to new I4F Click technology. Simply drop, lock and click into place.

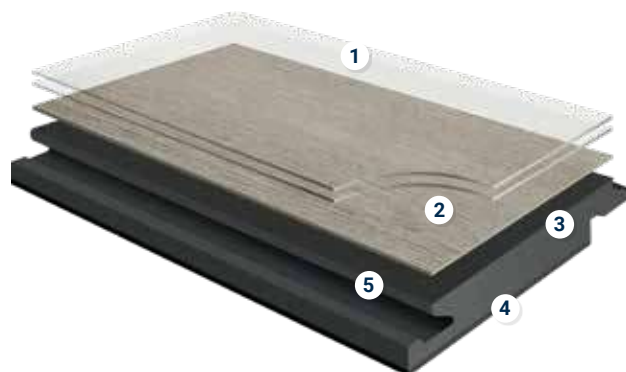

TECHNICAL DATA


	Standards	iD Click Ultimate 70	iD Click Ultimate 55	iD Click Ultimate 70 ^{Plus}	iD Click Ultimate 55 ^{Plus}
Certification & Classification					
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering			
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43*	Domestic: 23 Commercial: 33 Industrial: 42*	Domestic: 23 Commercial: 34	Domestic: 23 Commercial: 33
Technical Characteristics					
Total thickness	EN ISO 24346	6,50 mm			
Wear layer thickness	EN ISO 24340	0,70 mm	0,55 mm	0,70 mm	0,55 mm
Total weight	EN ISO 23997	11300 g/m²	11400 g/m²	11300 g/m²	11400 g/m²
Wear layer binder content	EN ISO 10582	Type I			
Dimensions	EN ISO 24342	Plank 200,5 x 1200 mm - 5 Plank = 1,23 m²/box - 64 box/pallet Plank 243 x 1500 mm - 3 Plank = 1,09 m²/box - 69 box/pallet Tile 480 x 480 mm - 5 Tile = 1,15 m²/box - 68 box/pallet Tile 243 x 486 mm - 11 Tile = 1,29 m²/box - 56 box/pallet Tile 480 x 960 mm - 3 Tile = 1,38 m²/box - 56 box/pallet		Planks 176 x 1213 mm - 6 Plank=1,281 m²/box - 60 box/pallet	
Surface treatment (PUR)	-	Yes - PUR Ultimate			
Bevelled edges	-	Yes			
Embossing in Register	-	No		Yes	
Technical Performance					
Dimensional stability	EN ISO 23999	0,05% Average Measured Value 0,15% Required Value			
Curl resultant to heat	EN ISO 23999	≤ 1 mm			
Reaction to fire	EN 13501-1	B _{fl} -s1			
Residual indentation	EN ISO 24343-1	0,02 mm Average Measured Value ≤0,10 mm Required Value			
Furniture leg	EN 424	No damage			
Castor chair	EN ISO 4918 - EN 425	No damage			
Impact sound reduction	EN ISO 717-2	ΔL _w = 19 dB / ΔL _{lin} = 7 dB **ΔL _w = 8 dB			
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,ew} < 85 dB)			
Thermal resistance	EN ISO 10456	0,05 m² K/W			
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6			
Chemical resistance	EN ISO 26987	Good			
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0,30		R9/R10 Depending on embossing μ ≥ 0,30	
Peeling resistance	EN ISO 24345	≥ 50 N / 50 mm			
Underfloor heating	-	Suitable - max. 27 °C			
Sustainable Performances					
VOC emission	EN 16516	Platinum (≤ 10 µg/m³)		Gold (≤ 100 µg/m³)	
Recyclable	-	100%			
Plasticizer	-	Phthalate-free			
Warranties					
Commercial warranty	-	10 years			
CE Marking					
DoP number	-	0197-0052-DoP-2019-08	0197-0053-DoP-2019-08	0132-0070-DoP-2018-01	0132-0070-DoP-2018-01

*only on references without acoustic backing

** only for references without backing

iD CLICK ULTIMATE 55-70

Contemporary Oak




Malt

55 : 24836 003
70 : 24736 003



Barley


55 : 24836 004
70 : 24736 004



Cane

55 : 24836 005
70 : 24736 005

English Oak



Hazel

55 : 24836 008
70 : 24736 008



Vanilla


55 : 24836 009
70 : 24736 009

Scandinavian Oak



Honey

55 : 24836 010
70 : 24736 010



Grey

55 : 24833 000
70 : 24733 000



Brown


55 : 24833 001
70 : 24733 001



Beige

55 : 24833 002
70 : 24733 002

Copper Oak




Natural

55 : 24833 006
70 : 24733 006




Light

55 : 24833 007
70 : 24733 007




Indium

55 : 24839 011
70 : 24739 011



Steel

55 : 24839 012
70 : 24739 012



Graphite

55 : 24839 013
70 : 24739 013

Polished Concrete

Loft



Medium

55 : 24842 014
70 : 24742 014



Dark

55 : 24842 015
70 : 24742 015



Light

55 : 24842 016
70 : 24742 016

Cersai



Clay

55 : 24845 017
70 : 24745 017



Granite

55 : 24845 018
70 : 24745 018

Tides



Satin

55 : 24839 019
70 : 24739 019



Charcoal

55 : 24839 020
70 : 24739 020

Logistics Information

Available in planks : Standard formats

 iD 55 : 24836 ---
 iD 70 : 24736 ---
 24.3 x 150 cm

 iD 55 : 24833 ---
 iD 70 : 24733 ---
 20.05 x 120 cm

Available in tiles formats

 iD 55 : 24845 ---
 iD 70 : 24745 ---
 24.3 x 46 cm

 iD 55 : 24842 ---
 iD 70 : 24742 ---
 24.3 x 46 cm

 iD 55 : 24839 ---
 iD 70 : 24739 ---
 24.3 x 96 cm

TECHNICAL DATA

	Standards	iD Click Ultimate 70	iD Click Ultimate 55
Certification & Classification			
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43*	Domestic: 23 Commercial: 33 Industrial: 42*
Technical Characteristics			
Total thickness	EN ISO 24346	6,50 mm	
Wear layer thickness	EN ISO 24340	0,70 mm	0,55 mm
Total weight	EN ISO 23997	11300 g/m²	11400 g/m²
Wear layer binder content	EN ISO 10582	Type I	
Dimensions	EN ISO 24342	Plank 200,5 x 1200 mm - 5 Plank = 1,23 m²/box - 64 box/pallet Plank 243 x 1500 mm - 3 Plank = 1,09 m²/box - 69 box/pallet	
		Tile 480 x 480 mm -5 Tile = 1,15 m²/box - 68 box/pallet Tile 243 x 486 mm - 11 Tile = 1,29 m²/box - 56 box/pallet Tile 480 x 960 mm - 3 Tile = 1,38 m²/box - 56 box/pallet	
Surface treatment (PUR)	-	Yes - PUR Ultimate	
Bevelled edges	-	Yes	
Embossing in Register	-	No	
Technical Performance			
Dimensional stability	EN ISO 23999	0,05% Average Measured Value 0,15% Required Value	
Curl resultant to heat	EN ISO 23999	≤ 1 mm	
Reaction to fire	EN 13501-1	B _n -s1	
Residual indentation	EN ISO 24343-1	0,02 mm Average Measured Value ≤0,10 mm Required Value	
Furniture leg	EN 424	No damage	
Castor chair	EN ISO 4918 - EN 425	No damage	
Impact sound reduction	EN ISO 717-2	ΔLw = 19 dB / ΔLlin = 7 dB **ΔLw = 8 dB	
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,e,w} < 85 dB)	
Thermal resistance	EN ISO 10456	0,05 m² K/W	
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	
Chemical resistance	EN ISO 26987	Good	
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0,30	
Peeling resistance	EN ISO 24345	≥ 50 N / 50 mm	
Underfloor heating	-	Suitable - max. 27 °C	
Sustainable Performances			
VOC emission	EN 16516	Platinum (≤ 10 µg/m³)	
Recyclable	-	100%	
Plasticizer	-	Phthalate-free	
Material Health Statement	-	Available	
Recycled content	-	Up to 20%	
Carbon footprint (Cradle-to-Gate, EPD Modules A1-A3)	-	12,26 CO₂e/m²	
Carbon footprint (Cradle-to-Cradle, EPD Modules A-D)	-	6,41 kg CO₂e/m²/year	
Warranties			
Commercial warranty	-	10 years	
CE Marking			
DoP number	-	0197-0052-DoP-2019-08	0197-0053-DoP-2019-08

*only on references without acoustic backing

** only for references without backing

Logistics Information	Laying direction	Sustainability credentials
Available in planks  Available in tiles 		




iD CLICK ULTIMATE 55-70^{PLUS}

Light Oak



Light Grey




70: 24775 013

55: 24797 013



Brown




70: 24775 012

55: 24797 012




Warm Brown




70: 24775 014

55: 24797 014

Stylish Oak



Beige




70: 24775 002

55: 24797 002



White




70: 24775 003

55: 24797 003



Grey




70: 24775 001

55: 24797 001




Natural




70: 24775 000

55: 24797 000

Riviera Oak




Grey




70: 24775 015

55: 24797 015



Light Brown




70: 24775 017

55: 24797 017



Warm Brown



70: 24775 017

55: 24797 017

	Standards	iD Click Ultimate 70 ^{Plus}	iD Click Ultimate 55 ^{Plus}
Certification & Classification			
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	
Classification	EN ISO 10874	Domestic: 23 Commercial: 34	Domestic: 23 Commercial: 33
Technical Characteristics			
Total thickness	EN ISO 24346	6,50 mm	
Wear layer thickness	EN ISO 24340	0,70 mm	0,55 mm
Total weight	EN ISO 23997	11300 g/m²	11400 g/m²
Wear layer binder content	EN ISO 10582	Type I	
Dimensions	EN ISO 24342	Planks 176 x 1213 mm - 6 Plank = 1,281 m²/box - 60 box/pallet	
Surface treatment (PUR)	-	Yes - PUR Ultimate	
Bevelled edges	-	Yes	
Embossing in Register	-	Yes on PLUS references	
Technical Performance			
Dimensional stability	EN ISO 23999	0,05% Average Measured Value 0,15% Required Value	
Curl resultant to heat	EN ISO 23999	≤ 1 mm	
Reaction to fire	EN 13501-1	B _s -s1	
Residual indentation	EN ISO 24343-1	0,02 mm Average Measured Value ≤0,10 mm Required Value	
Furniture leg	EN 424	No damage	
Castor chair	EN ISO 4918 - EN 425	No damage	
Impact sound reduction	EN ISO 717-2	ΔL _w = 19 dB / ΔL _{lin} = 7 dB *ΔL _w = 8 dB	
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,e,w} < 85 dB)	
Thermal resistance	EN ISO 10456	0,05 m² K/W	
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	
Chemical resistance	EN ISO 26987	Good	
Slip resistance	DIN 51130 EN 13893	R9/R10 Depending on embossing μ ≥ 0,30	
Peeling resistance	EN ISO 24345	≥ 50 N / 50 mm	
Underfloor heating	-	Suitable - max. 27 °C	
Sustainable Performances			
VOC emission	EN 16516	Gold (≤ 100 µg/m³)	
Recyclable	-	100%	
Plasticizer	-	Phthalate-free	
Warranties			
Commercial warranty	-	10 years	
CE Marking			
DoP number	-	0132-0070-DoP-2018-01	0132-0070-DoP-2018-01

* only for references without backing

Logistics Information	Laying direction	Sustainability credentials
Available in planks  17.6 x 121.3 cm		

- Plus Effect: Embossing In Register (EIR) technology for a look and feel close to the real thing
- Ideal for the renovation of commercial areas
- Fast, easy and economical
- Highly resistant product
- Perfect color matching LVT skirtings

iD INSPIRATION CLICK SOLID 55 & CLICK HIGH TRAFFIC 70

Delicate Oak Almond, Toffee & Barley



iD INSPIRATION CLICK SOLID 55 / iD INSPIRATION CLICK HIGH TRAFFIC 70

- 1 Surface embossing for a more natural look**
- 2 Tektanium PU coating**
with ultra matity, unequalled resistance and optimal cleanability
- 3 0.55 mm** (for iD Inspiration Click Solid 55) and **0.70 mm** (for iD inspiration Click high traffic 70) pure PVC transparent wear layer for a hard wearing, indentation-resistant surface compatible with
 - 0.55 mm : class 33 (heavy commercial) and 42 (general industrial) use
 - 0.70 mm : class 34 (heavy commercial) and 43 (general industrial) use
- 4 42 design options in high-definition printing**
- 5 Core layer with double glass-fibre reinforcement (FiberTech)** (for iD Inspiration Click Solid 55) and **Core layer with a patented reinforced construction** (for iD inspiration Click high traffic 70) to support high traffic
- 6 Fold-down Click System**

TECHNICAL DATA	Standards	iD Inspiration Click Solid 55	iD Inspiration Click High Traffic 70
Certification & Classification			
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42	Commercial: 34 Industrial:43
Technical Characteristics			
Total thickness	EN ISO 24346	5 mm	5 mm
Wear layer thickness	EN ISO 24340	0,55 mm	0,7 mm
Total weight	EN ISO 23997	8850 g/m²	8350 g/m²
Wear layer binder content	EN ISO 10582	Type I	Type I
Dimensions	EN ISO 24342	Plank 1220 x 190 mm - 7 Plank = 1,61 m²/box - 56 box/pallet Plank 240 x 1491 mm - 5 Plank = 1,79 m²/box - 51 box/pallet Tile 324 x 601 mm - 9 Tile = 1,75 m²/box - 54 box/pallet Tile 490 x 991 mm - 3 Tile = 1,46 m²/box - 62 box/pallet	Plank 1220 x 190 mm - 7 Plank = 1,61 m²/box - 56 box/palle Plank 240 x 1491 mm - 5 Plank = 1,79 m²/box - 51 box/palle Tile 324 x 601 mm - 9 Tile = 1,75 m²/box - 54 box/pallet Tile 490 x 991 mm - 3 Tile = 1,46 m²/box - 62 box/pallet
Surface treatment (PUR)	-	Yes - Tektanium	Yes - Tektanium
Bevelled edges	-	Yes	Yes
Embossing in Register	-	Yes on Authentics references	
Technical Performance			
Dimensional stability standard value	EN ISO 23999	≤ 0,15%	≤ 0,15%
Dimensional stability average measured value	EN ISO 23999	≤ 0,10 %	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 1 mm	≤ 1 mm
Reaction to fire	EN 13501-1	B _f -s1 loose laid over concrete substrate	B _f -s1 loose laid over concrete substrate
Residual indentation	EN ISO 24343-1	≤ 0,10 mm	≤ 0,10 mm
Furniture leg	EN 424	No damage	No damage
Castor chair	EN ISO 4918 - EN 425	No damage	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 5 dB	ΔLw = 5 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,e,w} < 85 dB)	Class C (L _{n,e,w} < 85 dB)
Thermal resistance	EN ISO 10456	0,05 m² K/W	0,05 m² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Excellent resistance	Excellent resistance
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30	R9 / R10 depending on embossing μ ≥ 0,30
Peeling resistance	EN ISO 24345	≥ 50 N / 50 mm	≥ 50 N / 50 mm
Underfloor heating	-	Suitable - max. 27 °C	Suitable - max. 27 °C
CE Marking			
DoP number	-	0197-0011-DoP-2021-02	0197-0051-DoP-2018-10
Sustainable Performances			
VOC emission	EN 16516	Platinum (≤ 10 µg/m³)	Platinum (≤ 10 µg/m³)
Recycled content	-	Up to 35%	Up to 35%
Recyclable	-	Yes - installation and post-consumer waste	Yes - installation and post-consumer waste
Plasticizer	-	Phthalate-free	Phthalate-free
Material Health Statement	-	Available	
Recycled content	-	Up to 35%	
Carbon footprint (Cradle-to-Gate, EPD Modules A1-A3)	-	13,38 CO₂e/m²	
Carbon footprint (Cradle-to-Cradle, EPD Modules A-D)	-	6,79 kg CO₂e/m²/year	
Warranties			
Commercial warranty	-	10 years	

Main Product Features	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	TEKTANIUM	Available in planks  iD 55: 24617 --- iD 70: 24605 ---  iD 55: 24616 --- iD 70: 24605 --- Available in tiles  iD 55: 24619 --- iD 70: 24608 ---  iD 55: 24625 --- iD 70: 24614 ---		      

iD INSPIRATION CLICK SOLID 55 / iD INSPIRATION CLICK HIGH TRAFFIC 70 – AUTHENTICS

Delicate Oak Almond, Toffee & Barley

Highland Oak



Arabica



088



*Cream




087



Golden



091



Noisette



090



*Smoke



089

Delicate Oak



Sugar



096



Barley



094



Clay




095



Almond



092



Toffee



093

Pearl Oak



Latte



099



Dune



097



Candis




100



Pekan



098



REALISTIC IMPRESSION

Logistics Information


Available in planks



iD 55: 24616 —
*iD 70: 24605 —

19,7 x 121,7 cm


Naturals decors will be available in click by end of 2021

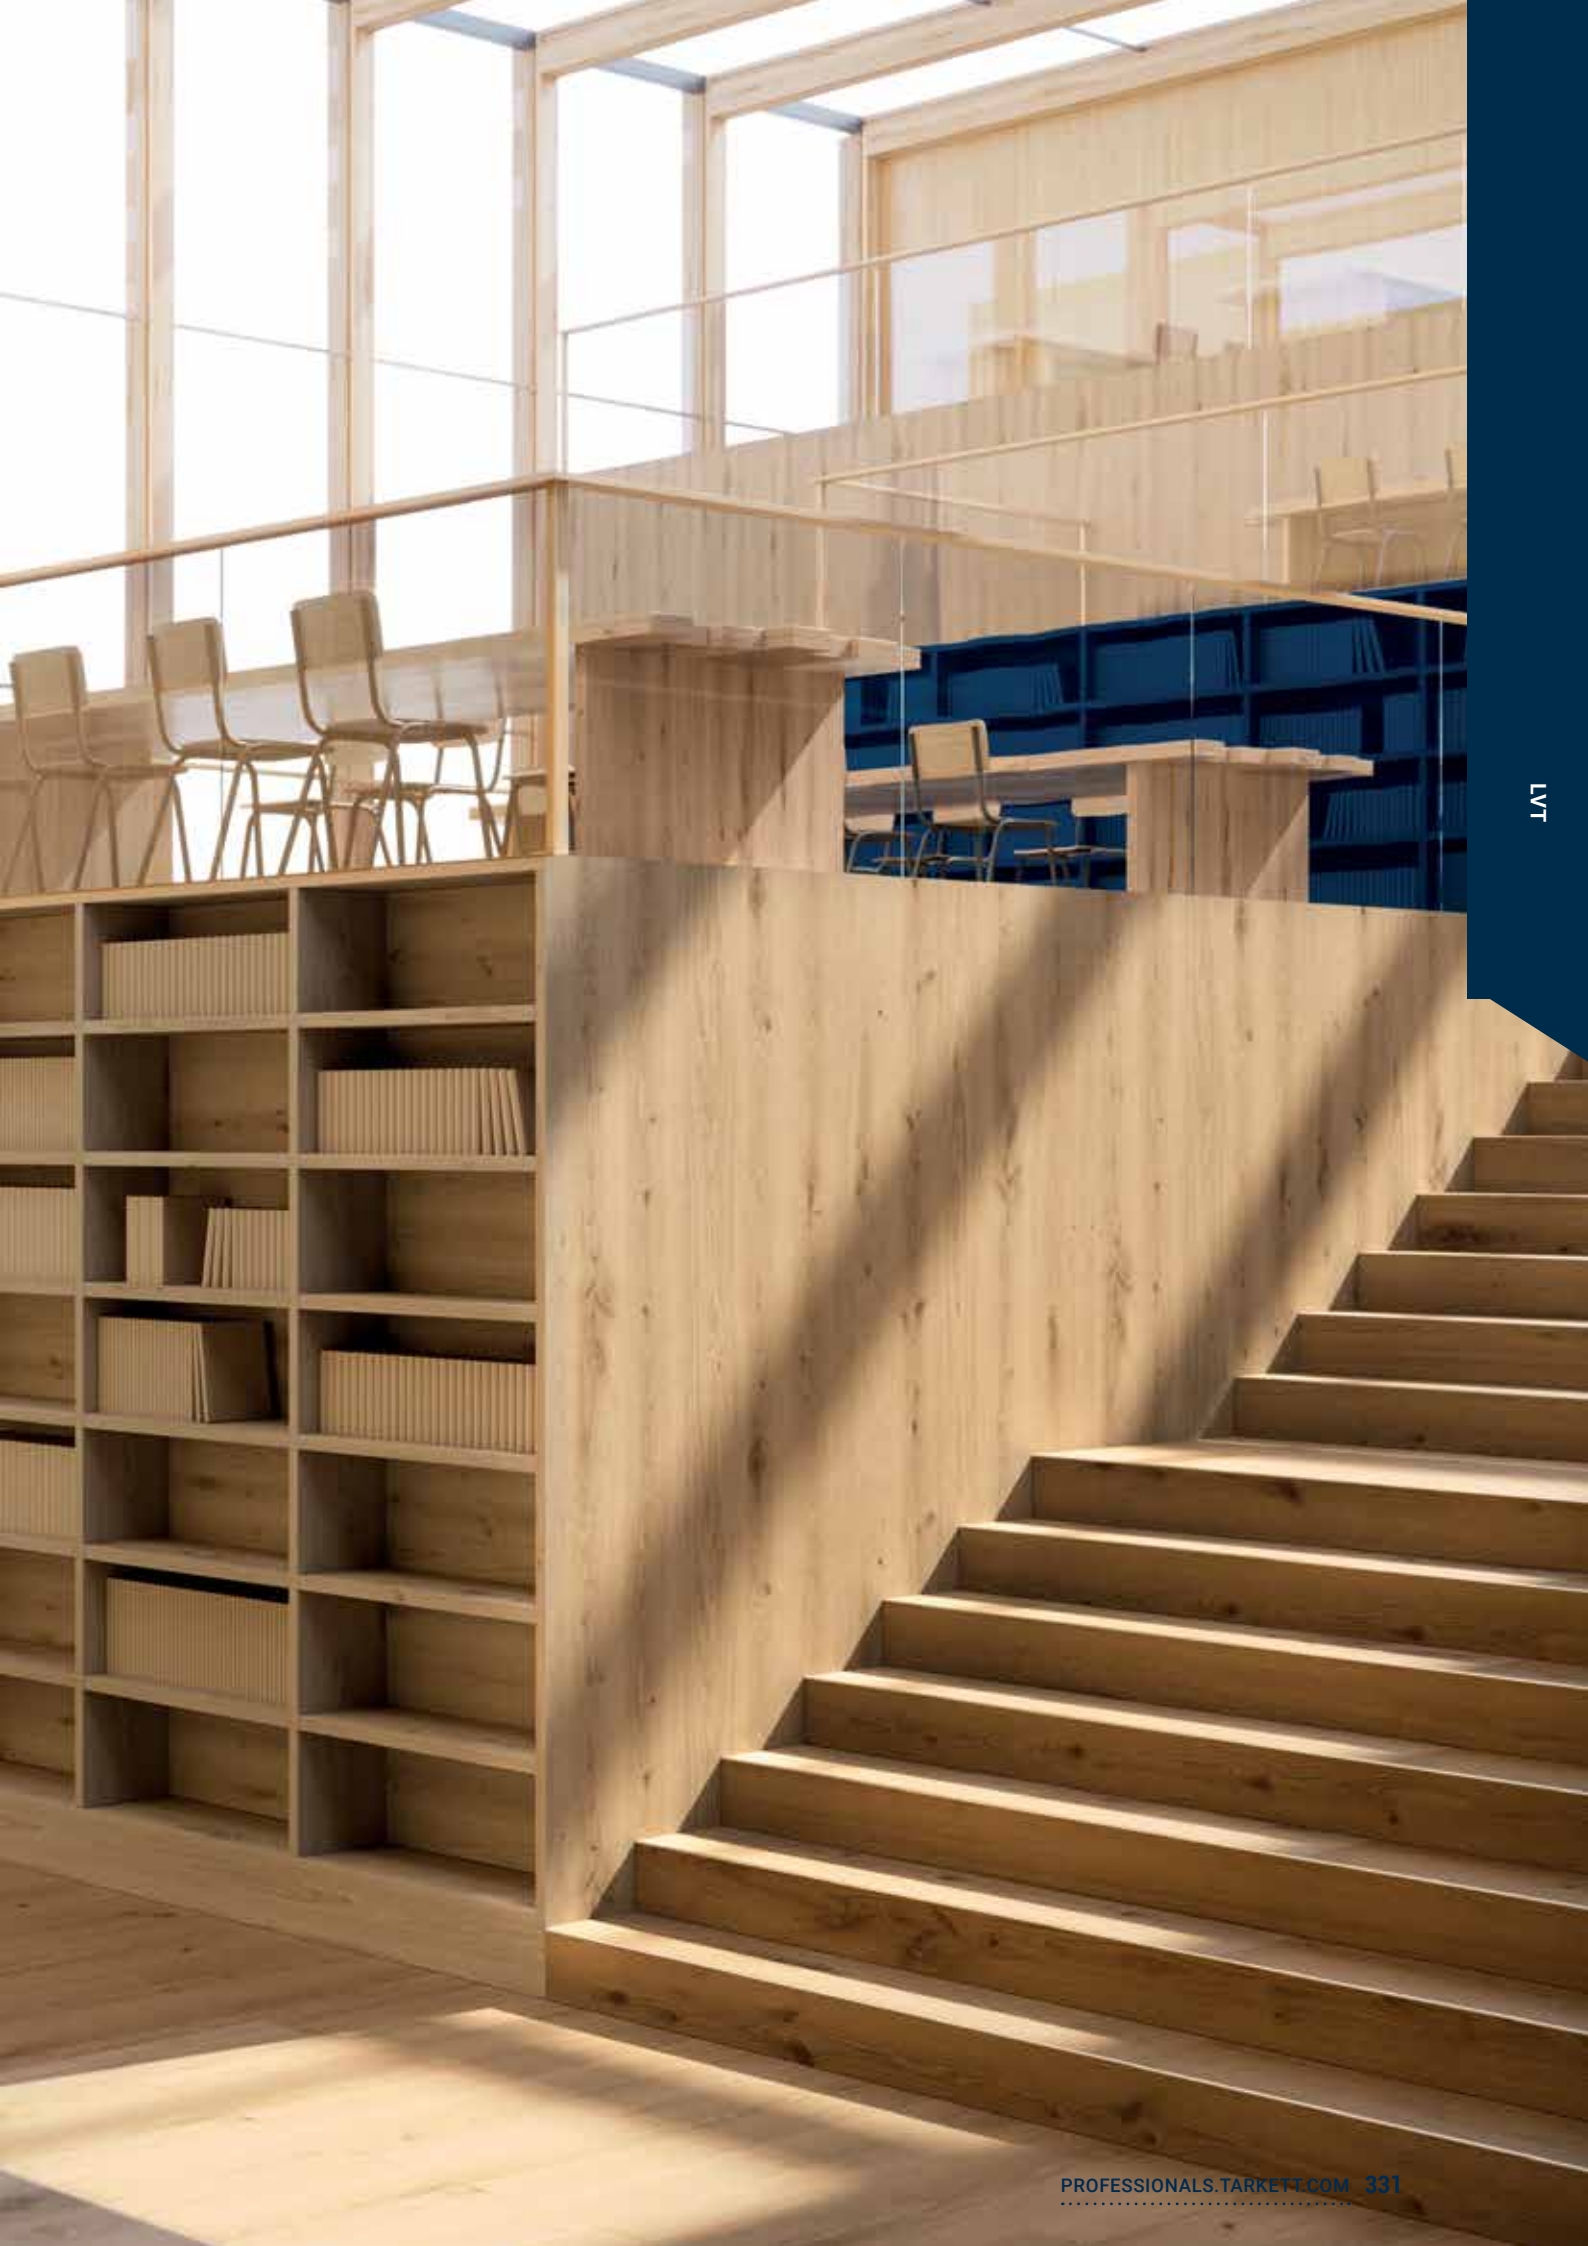

id INSPIRATION CLICK SOLID 55 / id INSPIRATION CLICK HIGH TRAFFIC 70 – CLASSICS

Scandinavian Oak Dark Grey -
Antik Oak Dark Grey -
Vintage Zinc Black

English Oak



*Classical

008



Brown

009



Natural

010



Grey Beige

011



Grege

012

Contemporary Oak



Natural

019



Grege

020



Grey

021



Beige

025



Light Grey

026

Scandinavian Oak



Warm Natural

027



Medium Grey

014




Dark Grey

015



Medium Beige

016



Dark Grey

006

Antik Oak

Brushed Pine




Beige

007



Natural

028



Brown

004




Grey

005

Page 575

Coordinated
accessories
offer



ROTOGRAVURE

Scandinavian Oak Dark Grey -
Antik Oak Dark Grey -
Vintage Zinc Black

Logistics Information

Available in planks



iD 55: 24617 --
*iD 70: 24605 --



iD 55: 24616
*iD 70: 24605 --

Available in tiles



iD 55: 24619 --
*iD 70: 24608 --



iD 55: 24625 --
*iD 70: 24614 --

Patina Ash



*Grey



017



Brown



018

Composite



*Cool Grey



???

Rock



Grey



009

Vintage Zinc




Silver



010


Oxide



Black



011



*Steel



012



Black steel



019



Copper



020



Eye-catching floors
for high-traffic
areas in offices,
hospitality
and retail

SENSORIAL BENEFITS

- Coordinated colours and patterns
- Enhances corporate image with a pleasant, productive environment

FUNCTIONAL BENEFITS

- Cost-effective installation
- Great dimensional stability
- Easy access to cables and pipes (raised floors)
- No wax, no polish for life with TopClean XP™!


ENVIRONMENTAL BENEFITS

- Low VOC emissions contribute to better indoor air quality
- Reduced carbon footprint
- Recyclable




iD INSPIRATION LOOSE LAY

- 1 TopClean XP™ PUR reinforcement for extreme resistance and easy low-cost maintenance
- 2 Wear layer 0.55 mm for commercial traffic resistance
- 3 Printed film in 22 different wood and stone designs
- 4 Core layer for proper resistance to indentation
- 5 Glass fiber reinforcement for perfect dimensional stability
- 6 Bottom layer for a solid basis to the product
- 7 Balancing layer for a curl-free product
- 8 Tarkett exclusive herringbone anti-skid backing for exceptional adherence to the subfloor and skid resistance in all directions

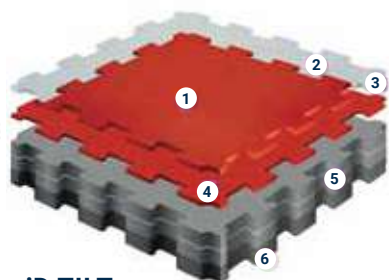

iD TILT

- 1 TopClean XP™ PUR reinforcement extreme resistance and easy low-cost maintenance
- 2 Surface embossing for better non-slip properties
- 3 Pure PVC transparent wear layer: exceptionally hard-wearing and indentation resistant
- 4 Design film: 7 design options
- 5 Core layer with glass fiber reinforcement: excellent dimensional stability and resistance to tear and indentation
- 6 Balancing layer for a curl-free product backing

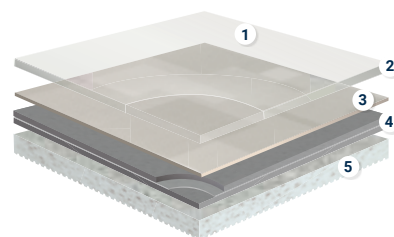

iD SQUARE

- 1 TopClean XP™ PUR reinforcement: extreme resistance and easy low-cost maintenance
- 2 0.80 mm pure PVC transparent wear layer: resistance to wear
- 3 Decorated compact impregnation: 37 design options
- 4 Structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre: exceptional dimensional stability and excellent resistance to tear and indentation
- 5 Chemical foam backing: enhanced acoustic performance

TECHNICAL OVERVIEW

	Standards	iD Inspiration Loose Lay	iD TILT	iD Square
Certification & Classification				
Type of floor covering	EN ISO 10582:2010	Heterogeneous PVC Compact floor covering	Modular heterogeneous product with interlocking connection	Heterogeneous Acoustic Resilient Floorcovering
CE certification	EN 14041		Yes	
Classification	EN ISO 10874	Commercial: 33 Industrial: 42	Commercial: 34 Industrial: 43	Commercial: 34
Wear layer binder content	EN ISO 10582	Type I	Type I	Type I
Technical Characteristics				
Total thickness	EN ISO 24346	4,5 mm	5.0 mm	4,5 mm
Total weight	EN ISO 23997	7500 g/m²	8000 g/m²	5195 g/m²
Wear layer thickness	EN ISO 24340	0.55 mm	0.70 mm	0.80 mm
Bevelled edges	-	Yes - 4 bevels on 3 references	No	No
Surface treatment (PUR)	-	Yes - TopCleanXP™	Yes - TopCleanXP™	Yes - TopCleanXP™
Form of delivery	EN ISO 24342	Plank 229 x 1219 mm - 10 Plank = 2,79 m²/box - 52 box/pallet Plank 1524 x254 mm (60x10") - 6 Plank = 2,322 m²/box - 52 box/pallet Tile 600 x 600 mm - 8 Tile = 2,88 m²/box - 40 box/pallet Tile 305 x 610 mm - 14 Tile = 2,6 m²/box - 54 box/pallet	Tile 457 x 457 mm - 10 Tile = 2,09 m²/box - 48 box/pallet Tile 914 x 914 mm - 3 Tile = 2,51 m²/box - 37 box/pallet	Parallogr.left 1200 x 200 mm - 10 Tile = 2 m²/box - 48 box/pallet Parallogright 1200 x 200 mm - 10 Tile = 2 m²/box - 48 box/pallet Plank 250 x 1000 mm - 9 Plank = 2,25 m²/box - 28 box/pallet Plank 1200 x 200 mm - 10 Plank = 2,4 m²/box - 48 box/pallet Tile 500 x 500 mm - 9 Tile = 2,25 m²/box - 48 box/pallet Tile 666 x 666 mm - 5 Tile = 2,22 m²/box - 26 box/pallet Tile 1000 x 1000 mm - 1 Tile = 1 m²/box - 1 box/pallet
PERformance For CE Marking Requirement (EN 14041)				
Reaction to fire	EN 13501-1	B _f -s1 loose laid on wood panel and A2 _f -s1 or A1fl class substrate	B _f -s1 over concrete substrate	B _f -s1 loose laid on an A1 _f and/or A2 _f substrate C _f -s1 loose laid on a wooden sub-floor
Electrostatic properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm	< 2 kV on concrete R1 > 10 ⁹ Ω	<2 kV on concrete > 10 ⁹ Ohm
Thermal resistance	EN ISO 10456	0,04 m² K/W	approx. 0.05 m² K/W	0,05 m² K/W
Antislip classification	EN 13893	μ ≥ 0.30	μ ≥ 0.30	μ ≥ 0.30
Technical Performance				
Dimensional stability	EN ISO 23999	≤ 0,10%	≤ 0.15%	≤ 0,10%
Reduction of in-room impact noise	EN ISO 31-074	Class C - L _{n,e,w} = < 78 dB	Class C - L _{n,e,w} = < 76 dB	Class B - L _{n,e,w} = < 65 dB
Accoustical absorption	EN ISO 11654	αW = 0.08		αW = 0.05
Curl resultant to heat	EN ISO 23999	≤ 1 mm	≤ 2 mm	
Impact sound reduction	EN ISO 717-2	ΔLw = 8 dB	ΔLw = 6 dB	ΔLw = 15 dB
Slip resistance	DIN 51130	R9	μ ≥ 0.30 DS R9	R10/R11 depending on Embossing
Furniture leg	EN 424	No damage	No damage	No damage
Castor chair	ISO 4918	No damage	No damage	No damage
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6
Residual indentation	EN ISO 24343-1	≤ 0,10 mm	< 0.10 mm	≤ 0,10 mm
Chemical resistance	EN ISO 26987	Good	Good	Very good
Underfloor heating	-	Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C
Sustainable Performances				
VOC emission	EN 16516	Gold (≤ 100 µg/m³)	Gold (≤ 100 µg/m³)	Platinum (≤ 10 µg/m³)
Recyclable	-	100%	100%	100%
Plasticizer	-	Phthalate-free	Phthalate-free	Phthalate-free
Warranties				
Commercial warranty	-	10 years		
CE Marking				
DoP number	-	0131-0055-DoP-2015-01	0131-0054-DoP-2015-01	0120-0067-DoP-2014-11



- Tarkett exclusive anti-skid backing preventing sliding in all directions
- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent acoustic efficiency
- Superior indentation resistance
- 36 high end wood and ceramic imitative decors

iD INSPIRATION LOOSE LAY

Delicate Wood



White

2464 0011



Grege

2464 0012



Black

2464 0013

Sawn Oak



Grey

2464 0016



Brown


2464 0017

Beach Wood



Beige

2464 0009



Grey

2464 0010

Elegant Oak



Beige

2464 0014



Natural

2464 0015

TECHNICAL DATA

	Standards	iD Inspiration Loose Lay
Certification & Classification		
Type of floor covering	EN ISO 10582:2010	Heterogeneous PVC Compact floor covering
Classification	EN ISO 10874	Commercial: 33 Industrial: 42
Wear layer binder content	EN ISO 10582	Type I
Technical Characteristics		
Total thickness	EN ISO 24346	4,5 mm
Total weight	EN ISO 23997	7500 g/m ²
Wear layer thickness	EN ISO 24340	0.55 mm
Bevelled edges	-	Yes - 4 bevels on 3 references
Surface treatment (PUR)	-	Yes - TopCleanXP™
Form of delivery	EN ISO 24342	Plank 229 x 1219 mm - 10 Plank = 2,79 m ² /box - 52 box/pallet Plank 1524 x 254 mm (60x10") - 6 Plank = 2,322 m ² /box - 52 box/pallet Tile 600 x 600 mm - 8 Tile = 2,88 m ² /box - 40 box/pallet Tile 305 x 610 mm - 14 Tile = 2,6 m ² /box - 54 box/pallet
Performance For CE Marking Requirement (EN 14041)		
Reaction to fire	EN 13501-1	B _f -s1 loose laid on wood panel and A2 _f -s1 or A1 _f class substrate
Electrostatic properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Thermal resistance	EN ISO 10456	0,04 m ² K/W
Antislip classification	EN 13893	μ ≥ 0.30
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 1 mm
Impact sound reduction	EN ISO 717-2	ΔLw = 8 dB
Slip resistance	DIN 51130	R9
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Light fastness	EN ISO 105-B02	≥ 6
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Chemical resistance	EN ISO 26987	Good
Underfloor heating	-	Suitable - max. 27 °C
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	EN 14041	0131-0055-DoP-2015-01

Surface Treatment	Logistics Information	Sustainability credentials
 	Available in planks   22,9 x 121,9 cm 25,4 x 152,4 cm Available in tiles   Available in chevrons  	   


ID INSPIRATION LOOSE LAY

Limed Oak



Beige

2464 0000



Grey

2464 0001



Honey

2464 0019

Christmas Pine



White

2464 0006



Natural

2464 0007

Scandinavian Oak



Light Grey

2464 0023



Light Beige


2464 0024



Medium Beige

2464 0025

Mountain Oak



Natural


2464 0003



Black

2464 0005

Living Oak



Brown

2464 5020



Grey

2464 5021



Natural

2464 5022

Modern Terrazo



Grey


2464 4035



Black


2464 4036

Cotton



Brown

2464 4032



Light Grey


2464 4033



Medium Grey

2464 4034

Metal Plate



Grid

2464 4037



Sand

2464 4038

Concrete



Sand

2464 4027



Anthracite

2464 4028



White

2464 4029

Beton



Grey

2464 1002



Light Grey

2464 1026

Marble



Black

2464 4030



Relaxed

2464 4031

Slate

Logistics Information

Available in planks



22,9 x 121,9 cm



25,4 x 152,4 cm

Available in tiles





Page 575

Coordinated
accessories
offer



- New designs and formats to perfectly fit to your project
- Extreme connection resistance, for long-lasting performance in high traffic areas
- Easy and quick installation thanks to its interlocking connection (no glue, no click)
- Excellent value for money

iD TILT

Granite - Grey

Granite




Grey

4697 005




Blue

4697 007



Black


4697 004



Red

4697 006

Concrete



Beige

24750 000




Grey

24750 001



Dark Grey

24750 002



Black

24750 004

Tarmac

TECHNICAL DATA

	Standards	iD TILT
Certification & Classification		
Type of floor covering	EN ISO 10582	Modular heterogeneous product with interlocking connection
CE certification	EN 14041	Yes
Classification	EN ISO 10874 (EN 685)	Commercial: 34 Industrial: 43
Wear layer binder content	EN ISO 10582	Type I
Technical Characteristics		
Total thickness	EN ISO 24346	5.0 mm
Total weight	EN ISO 23997	8000 g/m ²
Wear layer thickness	EN ISO 24340	0.70 mm
Bevelled edges	-	No
Surface treatment (PUR)	-	Yes - TopCleanXP™
Dimensions	EN ISO 24342 - EN 427	Tile 457 x 457 mm - 10 Tile = 2,09 m ² /box - 48 box/pallet Tile 914 x 914 mm - 3 Tile = 2,51 m ² /box - 37 box/pallet
Performance For CE Marking Requirement (EN 14041)		
Reaction to fire	EN 13501-1	B _{fl} -s1 over concrete substrate
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ω
Thermal resistance	EN ISO 10456	approx. 0.05 m ² K/W
Antislip classification	EN 13893	
Technical Performance		
Dimensional stability	EN ISO 23999 - EN 434	≤ 0.15 %
Curl resultant to heat	EN ISO 23999 - EN 434	≤ 2 mm
Impact sound reduction	EN ISO 717-2	ΔL _w = 6 dB
Slip resistance	EN 13893 DIN 51130	μ ≥ 0.30 DS R9
Furniture leg	ISO 16581 - EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Light fastness	EN ISO 105-B02	≥ 6
Residual indentation	EN ISO 24343-1 - EN 433	< 0.10 mm
Resistance to chemicals	EN ISO 26987 - EN 423	Good
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	-	0131-0054-DoP-2015-01

*The 2 formats are not interconnectable


Surface Treatment	Logistics Information	Sustainability credentials
 	Available in tile with interlocking connection system 	   



- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent acoustic efficiency (15 dB)
- Confort underfoot (low walking noise)
- 50 trendy textiles, artistic, wood and ceramic decors
- Many customization possibilities (Format, Colors and Designs)


iD SQUARE

Patine




Light Chocolate

24564 040




Anthracite

24564 044



Grey

24564 002
24578 002




Dark Anthracite

24564 046



Chalk

24564 064




Solid Blue

24564 065




Solid Green

24564 066



Solid Yellow


24564 067



Solid Red

24564 068

Dashes




Petrol

24562 072



Green

24562 070



Camel

24562 071

Terrazo Murano



Multico

24563 075

TECHNICAL DATA

	Standards	iD Square
Certification & Classification		
Type of floor covering	EN ISO 10582 EN 651	Heterogeneous Acoustic Resilient Floorcovering
Classification	EN ISO 10874	Commercial: 34
Wear layer binder content	EN ISO 10582	Type I
Technical Characteristics		
Total thickness	EN ISO 24346	4,5 mm
Total weight	EN ISO 23997	5195 g/m²
Wear layer thickness	EN ISO 24340	0.80 mm
Bevelled edges	-	No
Surface treatment (PUR)	-	Yes - TopCleanXP™
Form of delivery	EN ISO 24342	Paralogr.left 1200x200 mm - 10 Tile = 2 m²/box - 48 box/pallet Paralogr.right 1200x200 mm - 10 Tile = 2 m²/box - 48 box/pallet Plank 250 x 1000 mm - 9 Plank = 2,25 m²/box - 28 box/pallet Plank 1200x200 mm - 10 Plank = 2,4 m²/box - 48 box/pallet Tile 500 x 500 mm - 9 Tile = 2,25 m²/box - 48 box/pallet Tile 666 x 666 mm - 5 Tile = 2,22 m²/box - 26 box/pallet Tile 1000 x 1000 mm - 1 Tile = 1 m²/box - 1 box/pallet
Performance For CE Marking Requirement (EN 14041)		
Reaction to fire	EN 13501-1	B _{fl} s1 loose laid on an A1 _{fl} and/or A2 _{fl} substrate C _{fl} s1 loose laid on a wooden sub-floor
Electrostatic properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Thermal resistance	EN ISO 10456	0,05 m² K/W
Antislip classification	EN 13893	μ ≥ 0.30
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Reduction of in-room impact noise	EN ISO 31-074	Class B - L _{n,e,w} = < 75 dB
Acoustical absorption	EN ISO 11654	α _W = 0.05
Impact sound reduction	EN ISO 717-2	ΔL _w = 15 dB
Slip resistance	DIN 51130	R9/R10 depending on Embossing
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Light fastness	EN ISO 105-B02	≥ 6
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Chemical resistance	EN ISO 26987	Very good
Underfloor heating	-	Suitable - max. 27 °C
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	EN 14041	0120-0067-DoP-2014-11

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
 	Available in planks  25 x 100 cm  20 x 120 cm Available in tiles  50  66  100 Available in chevrons  Left 20 x 120 cm  Right 20 x 120 cm	  Square tiles	      

iD SQUARE

Minimal Wood




Natural

24563 100
24567 100



Dark Grey


24563 102
24567 102



Grey

24563 101
24567 101

Tisse



Chocolat


24560 033



Dark Grey

24560 032

English Oak



Dark Grege

24576 304



Warm Gold

24576 302



Beige

24576 305



Grege

24576 301



Grey

24576 303

Citizen Oak



Black

24576 300



Golden


24593 087
24597 087
24599 087



Natural


24593 088
24597 088
24599 088

Walnut



Walnut

24593 089

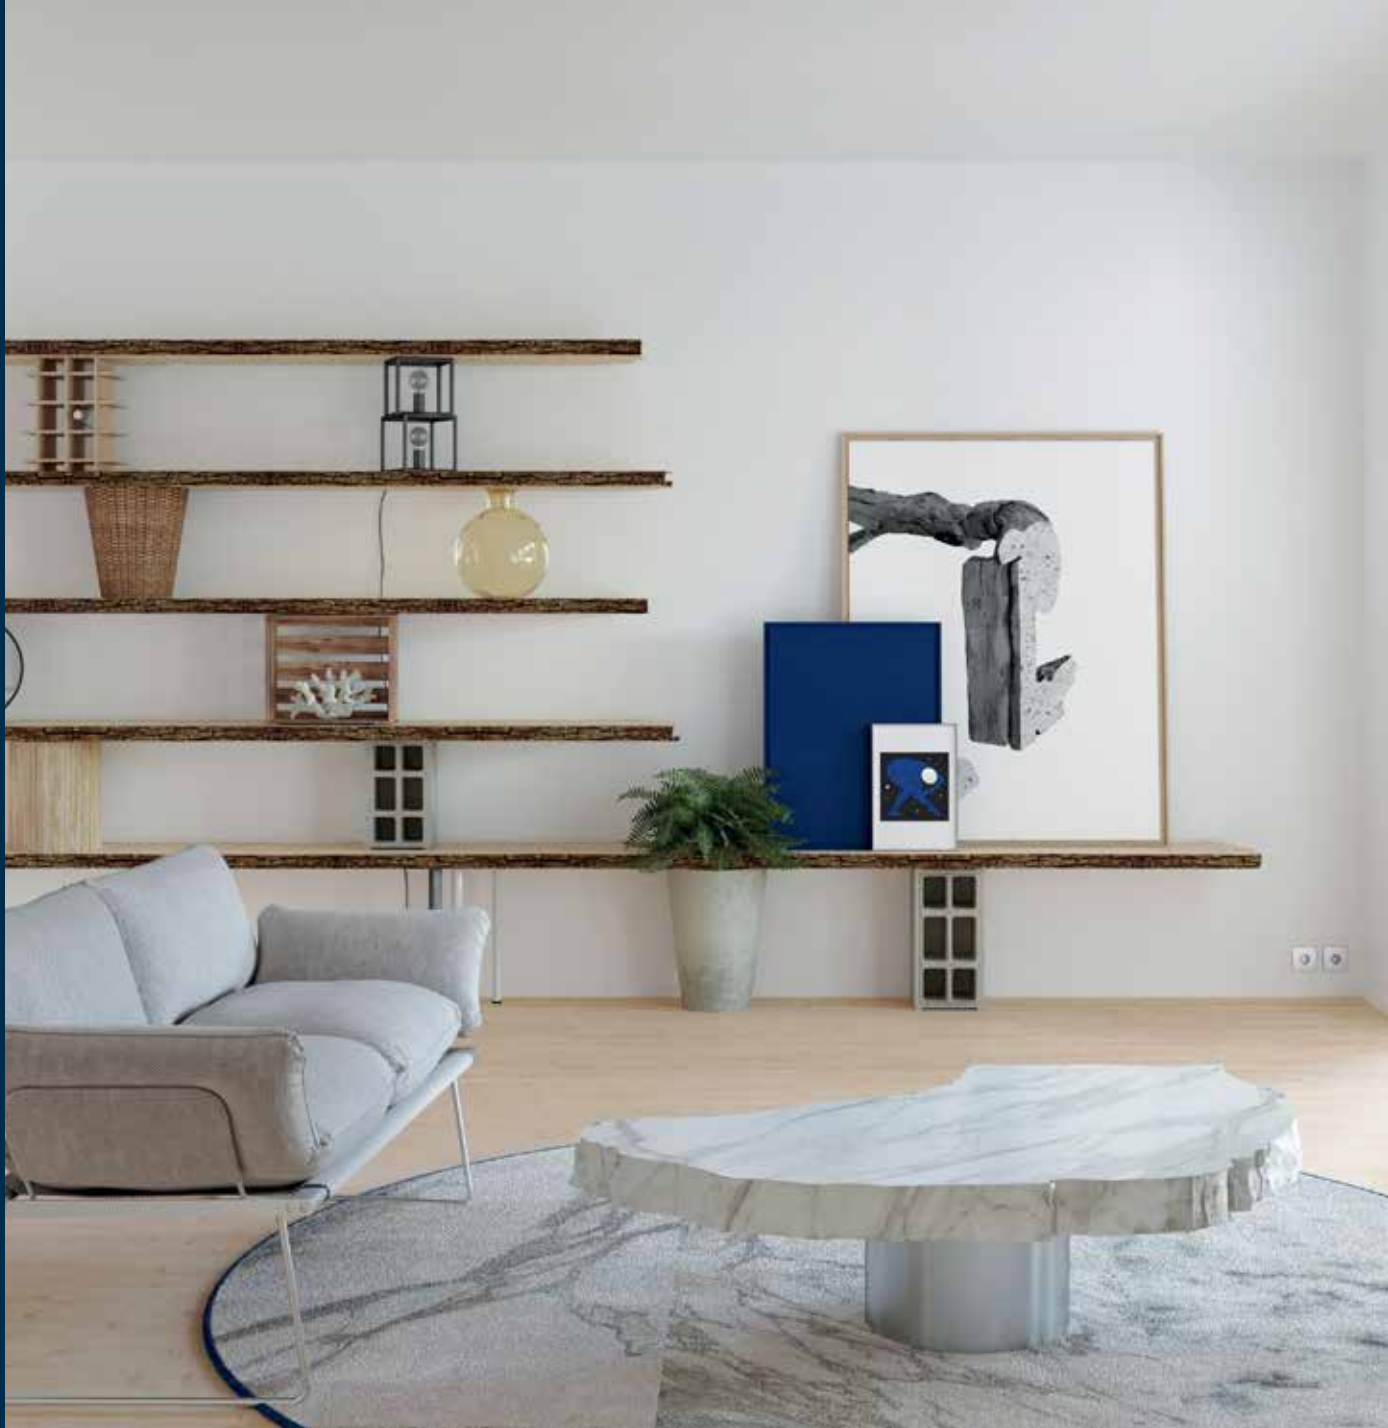

SENSORIAL BENEFITS

- Coordinated colours and patterns
- A large choice of designs
- Personalise every aspect of your project using feature lines and matching skirtings

FUNCTIONAL BENEFITS


- High resistance with 0.30 mm transparent wear-layer
- Easy to maintain
- Unequalled resistance and ultra matity with Tetktanium™ PU coating

ENVIRONMENTAL BENEFITS

- 100% recyclable
- 100% phthalate-free
- Ultra low VOC (<10 µg/m³)

iD INSPIRATION 30

- 1 Surface embossing & textures:**
close to real materials
- 2 Tetktanium PU coating**
ultra matity and unequalled resistance
- 3 0.30 mm pure PVC transparent wear layer:**
hard-wearing and indentation resistant
- 4 50 design options in high definition printing**
Realistic designs
- 5 Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre:**
exceptional dimensional stability and excellent resistance to tear and indentation
- 6 PVC backing**

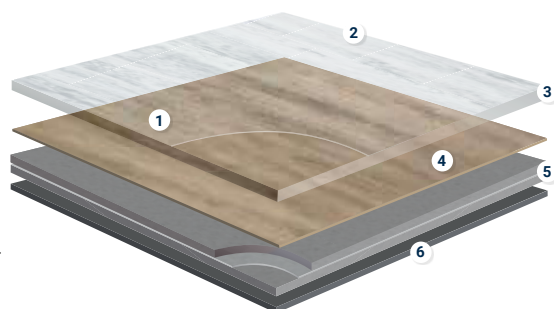

TECHNICAL DATA


	Standards	iD Inspiration 30
Certification & Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Class of use	EN ISO 10874	Domestic: 23 Commercial: 31
Technical Characteristics		
Total thickness	EN ISO 24346	2 mm
Wear layer thickness	EN ISO 24340	0,30 mm
Surface treatment (PUR)	-	Yes – Tektanium
Total weight	EN ISO 23997	3400 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Beveled edges	-	No
High definition Digitally Printed	-	Yes on Naturals references
Embossing in Register	-	Yes on Authentics references
Dimensions	EN ISO 24342	Plank 1200x200 mm - 19 Plank = 4,56 m ² /box - 55 box/pallet Plank 1200 x 285 mm - 13 Plank = 4,45 m ² /box - 54 box/pallet Plank 250 x 1500 mm - 12 Plank = 4,5 m ² /box - 56 box/pallet Tile 500 x 500 mm - 18 Tile = 4,5 m ² /box - 52 box/pallet Tile 666 x 333 mm - 20 Tile = 4,44 m ² /box - 40 box/pallet Tile 500 x 1000 mm - 9 Tile = 4,5 m ² /box - 54 box/pallet
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,15 %
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over concrete substrate B _{fl} -s1 glued over wood substrate
Residual indentation	Average measured value EN ISO 24343-1	≤ 0,05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 3 dB
Reduction of in-room impact noise	NF S31-074	Class C (L _{n,e,w} < 85 dB)
Thermal resistance	ISO 10456	0,02 m ² K/W
Light fastness	EN ISO 105-B02 Method 3a	≥ 6
Chemical resistance	EN ISO 26987	Excellent
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30
Peeling resistance	-	≥ 50 N / 50 mm
Underfloor heating	-	Suitable - max. 27°C
CE Marking		
DoP number	-	0120-043DoP-2013-04
Sustainable Performances		
VOC emission	EN 16516	Platinum (≤ 10 µg/m ³)
Recycled content	-	Up to 35%
Recyclable	-	Yes - installation waste
Plasticizer	-	Phthalate-free
Warranties		
Commercial warranty	-	10 years

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
TEKTANIUM	Available in planks  iD 30: 24524 —  iD 30: 24526 —  iD 30: 24525 —	 Wood  Square tiles  Rectangular tiles	     
	Available in tiles  iD 30: 24532 —  iD 30: 24529 —  iD 30: 24533 —		

ID INSPIRATION 30 – NATURALS

Terrazzo Classical Nero
- Nomad Oak Linen

Forest Oak



Nutmeg



029



Pistaccio shell



030



Natural




031



Natural



065



Sunburned



066

Nomad Oak



Coffee



072



Hazel



071



Linen




069



Oat



070



Black



053

Swiss Oak



Natural



075



Smoked



076



Stained



077



Smoked



063



Original



064

Brushed Elm



Natural



054



Grege



055



Beige



056



Brown



057




Natural



060

Page 575

Coordinated
accessories
offer



DIGITAL PRINTING



2x6 m NO REPEAT



BIGFOOT FORMAT
28,5 x 120 cm



Nomad Oak Linen

Logistics Information

Available in planks



iD 30: 24524 ---

20 x 120 cm



iD 30: 24526 ---

28,5 x 120 cm



iD 30: 24525 ---

25 x 150 cm

Available in tiles



iD 30: 24532 ---



iD 30: 24529 ---



iD 30: 24533 ---

Douglas Pine



Brown

061



Beige

062



Creme

045



Soaped

046

Belgian Stone



Dune

036

Carrara Grande



Loam

035



Silt


037



White

044

Liguria Slate



Black

067

Terrazzo Classical




Nero

079

iD INSPIRATION 30 – CLASSICS

Scandinavian Oak Dark Grey -
Antik Oak Dark Grey -
Vintage Zinc Black


English Oak



Classical



008



Brown



009



Natural



010



Grey Beige



011




Grege



012

Contemporary Oak



Natural



019



Grege



020



Grey



021



Beige



025



Light Grey



026

Scandinavian Oak



Warm Natural



027



Medium Grey



014



Dark Grey




015



Medium Beige



016



Dark Grey



006


Composite



Beige



007



Cool Grey



013




Grey



021


Rock



Silver



002




Black



003

Vintage Zinc



ROTOGRAVURE

Logistics Information

Available in planks



iD 30: 24524 —

20 x 120 cm

Available in tiles



iD 30: 24532 —



iD 30: 24533 —

Scandinavian Oak Dark Grey -
Antik Oak Dark Grey -
Vintage Zinc Black



SENSORIAL BENEFITS


- Coordinated colours and designs
- Matching skirtings for a perfect finish
- Range of stylish accessories available

FUNCTIONAL BENEFITS

- Little or no subfloor preparation required
- Click system enables floating installation without glue and is quicker to install
- Easier and cheaper to renovate
 - can be removed without damaging the subfloor
- - Tektanium PU coating with ultra matity, unequalled resistance and optimal cleanability

ENVIRONMENTAL BENEFITS

- Ultra low VOC emissions contribute to optimal indoor air quality
- No glue required
- 100% Phthalate-free

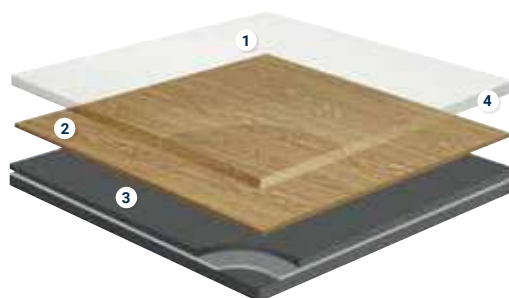

iD INSPIRATION CLICK SOLID 30

1. Tektanium PU coating
2. Design
printed PVC film
3. PVC Compact
backing and middle layers
4. Ultra tough transparent
PVC wear layer

TECHNICAL DATA

	Standards	iD Inspiration Click Solid 30
Certification & Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Class of use	EN ISO 10874	Domestic: 23 Commercial: 31
Technical Characteristics		
Total thickness	EN ISO 24346	5 mm
Wear layer thickness	EN ISO 24340	0,30 mm
Surface treatment (PUR)	-	Yes – Tektanium
Total weight	EN ISO 23997	8900 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Beveled edges	-	Yes
Dimensions	EN ISO 24342	Plank 1220x190 mm - 7 Plank = 1,61 m ² /box - 56 box/pallet Plank 240 x 1491 mm - 5 Plank = 1,79 m ² /box - 51 box/pallet Tile 324 x 601 mm - 9 Tile = 1,75 m ² /box - 54 box/pallet Tile 490 x 991 mm - 3 Tile = 1,46 m ² /box - 62 box/pallet
Technical Performance		
Dimensional stability standard value	EN ISO 23999	≤ 0,15 %
Dimensional stability average measured value	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 24346	≤ 1 mm
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over concrete substrate
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 5 dB
Reduction of in-room impact noise	NF S31-074	Class C (L _{n,e,w} < 85 dB)
Thermal resistance	ISO 10456	0,05 m ² K/W
Light fastness	EN ISO 105-B02 Method 3a	≥ 6
Chemical resistance	EN ISO 26987	Very good
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30
Peeling resistance	-	≥ 50 N / 50 mm
Underfloor heating	-	Suitable - max. 27°C
CE Marking		
DoP number	-	0197-0054-DoP-2021-02
Sustainable Performances		
VOC emission	EN 16516	Platinum (≤ 10 µg/m ³)
Carbon footprint (Cradle-to-Gate, EPD Modules A1-A3)	-	13,38 CO ₂ e/m ²
Carbon footprint (Cradle-to-Cradle, EPD Modules A-D)	-	6,79 kg CO ₂ e/m ² /year
Recycled content	-	Up to 35%
Recyclable	-	Yes - installation waste
Plasticizer	-	Phthalate-free
Warranties		
Commercial warranty	-	10 years

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
TEKTANIUM	Available in planks  iD 30: 24627 —  iD 30: 24617 — Available in tiles  iD 30: 24630 —  iD 30: 24632 —		     

iD INSPIRATION CLICK SOLID 30 – AUTHENTICS

Delicate Oak Almond,
Toffee & Barley

Highland Oak



Arabica



088



*Cream



087



Golden



091



Noisette



090



*Smoke



089

Delicate Oak



Sugar



096



Barley



094



Clay




095



Almond



092



Toffee



093

Pearl Oak



Latte



099



Dune



097



Candis



100



Pekan



098

Logistics Information

Available in planks



iD 30: 24627 —

19,70 x 121,70 cm

INSTALLATION INSTRUCTIONS FOR HARD FLOORINGS

WOOD FLOORINGS

Installing the floor

Before you begin, ensure that the sub floor is levelled, firm, dry and clean. The room where you are installing the floor should have the right temperature and humidity. This also applies to the room where you are keeping the packs of wood. The packs should not be opened until immediately before installation.

Underlay material

For a floating floor, i.e. when the floor is joined together without being attached to the sub floor, you should use an underlay material to level the surface and reduce walking noise. Use an underlay with a long life.



A wooden floor is hard, so to increase comfort it is important to install a shock-absorbent underlay. Tarkofoam II and Tarkoflex II have been developed to meet these requirements. Don't forget a vapour barrier to protect against humidity migration you should apply a vapour barrier over the whole sub floor during the installation for certain types of floor. A vapour barrier is a polythene foil that is laid with an overlap of at least 200 mm or is sealed with tape. Tarkoflex II combines an underlay and vapour barrier in one product.

Underfloor heating

The heating system has to be a self-limiting system that provides even heating across the whole floor surface. The surface temperature must not exceed 27°C. Floor heating can cause cracks between the floor boards. Beech is more prone to movement than other types of wood and underfloor heating is therefore not recommended for use with these floors.

A. FLOATING INSTALLATION



Floating installation

You can install the new wooden floor directly on top of the old one, regardless of whether it is a wooden floor or a plastic floor. On floors with a surface area greater than 12 x 20 metres, we recommend to glued down installation (see next page). When you install a floor the boards must always be laid lengthwise in the room, and an expansion gap must be left at all fixed points such as walls, thresholds, pipes and steps.

There must be no contact between floors in different rooms. Large areas of floor must be broken up into smaller areas with the use of expansion gaps.






Two smart solutions from Tarkett make it easy to install your new wooden floor without glue: Ultraloc and 2-lock



ULTRALOC

2-LOCK

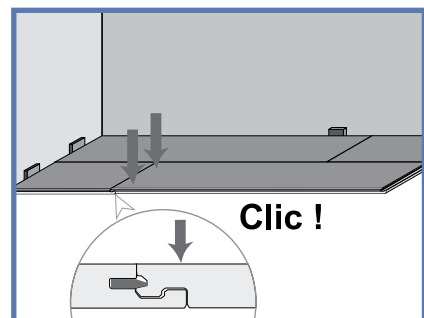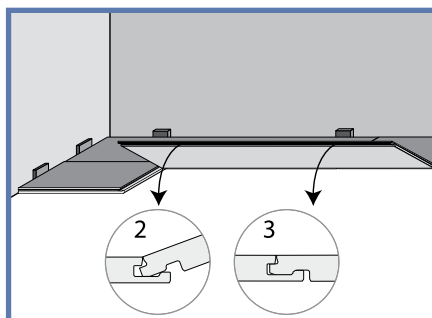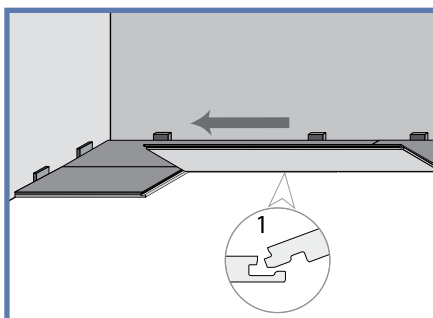

B. GLUED DOWN INSTALLATION

Conditions

Gluing to the subfloor reduces the movement of the wood floor, and is recommended for laying patterns, covering large areas, etc. Glue down installation is also improving the acoustic properties which are recommended for offices and other segments/areas where it is important to reduce stepping sounds.

The subfloor must be level, stable, dry and clean and must meet the relevant building regulations and norms.

The relative air humidity (RH) must be between 30% and 60% and the temperature must be at least 18°C before, during and after installation. As moisture may appear in a new building, the room should be heated and aired in good time before installation, so that the right indoor climate is achieved.

Tools

In addition to traditional tools we recommend using Tarkett Tarktool and specially shaped Tarkett tapping block along with a serrated adhesive spreader. The tapping block protects the edges of the boards when tapping them together – never use a cut bit of board as a tapping block, as this will chip the edges.

The Tarktool, Tarkett's pull bar, makes it easier to get the last row of boards in place. Cut the boards in such a way that you don't get splintery edges.

Damp proof membrane

A traditional damp proof membrane cannot be laid when the wood floor is going to be glued to the subfloor. If damp is suspected in the subfloor, use an MS-type adhesive and primer (see the Gluing section). Alternatively, lay 0.2 mm sheeting onto the concrete floor and then fix a layer of plywood, min 12 mm thick, on top. The wood floor can then be glued to the plywood.

Planning installation

Installation direction: If the room is fairly square, the length of the boards should run parallel to the incoming light. In long, narrow rooms it is best to install the boards along the length of the room. Measure the room. If the last row of boards will be narrower than 5 mm or if the wall is not straight, the first row of boards should be cut. We recommend that the row of boards is laid out and cut to size before adhesive is applied and the boards are finally installed.

Installing plank: The wear layer of plank comprises one large strip of wood and colour differences between boards do occur. Even minor differences in shade between neighbouring boards may be perceived as disturbing. Therefore, when installing plank flooring, the boards should be sorted. Open several packs and create a gradual colour transition. This avoids the lightest boards being placed next to the darkest.

Expansion gap

Gluing boards to the subfloor reduces the need for an expansion gap. For example, the wood floor can be installed alongside an adjoining stone floor. For practical reasons, we recommend leaving a space of 4-5 mm between the floor and the wall. If there are any expansion joints in the subfloor, the wood floor should be split at these.



Joining boards

Traditional tongue and groove: If gluing the floor, boards with traditional tongue and groove must only be glued along the groove at the short end. The boards are joined as usual with a tapping block (shaped) and a hammer.

Ultraloc: Only glue one row of boards at a time. Use the traditional tapping block and tap along the tongue side. Note that Ultraloc boards must not be glued in the profiles. Use a heavy hammer, as one hard tap is better than many small ones.

2-lock: Angled locking systems, with the boards joined by angling in and pressing down into the profile of the previous board.

Different types of subfloors

Wood flooring can be glued to a sub-floor of concrete, particleboard or plywood or onto an existing wood floor. In each case, the subfloor must be sound, level and dry and must meet the requirements in the Conditions section above.



SEGNO	Tarkett MS Adhesive	Tarkett MS Primer
	8790110	8790111
RF <65	800 ± 100 g/m ²	0 g
RF 65-85	800 ± 100 g/m ²	250 g
RF 85-90	800 ± 100 g/m ²	250 g

10-22 MM PARQUET	Tarkett MS Adhesive	Tarkett MS Primer
	8790110	8790111
RF <65	1200 ± 100 g/m ²	0 g
RF 65-85	1200 ± 100 g/m ²	250 g
RF 85-90	1200 ± 100 g/m ²	250 g

Adhesive guide

Using Tarkett MS Adhesive and Tarkett MS Primer will ensure a good result. Parquet boards can for example be glued down on concrete, plywood, chipboards or an old wooden floor. In all cases the subfloor must be firm, flat, clean and dry. For more information access the installation instruction included in the floor pack or find the detailed instructions on the web <http://professionals.tarkett.com>. If you have any further questions, please contact your nearest flooring retailer.

Installation instructions are included in every third floor pack. Detailed instructions can also be downloaded from <http://professionals.tarkett.com>. If you have any further questions, please contact your nearest flooring retailer.

PICTOGRAMS GLOSSARY

APPLICATION



Healthcare



Education



Stores
& Shops



Hospitality,
Travel and
Leisure



Workplace



Home



Aged Care



Sports
& Wellness

CLASS OF USAGE




Domestic
use



Commercial
use



Industrial
use



INSTALLATION



Monolithic
installation



Quarter turn
installation



Brick
installation



Ashlar
installation



Random
installation



Planks /
Herringbone
one way



Planks /
Herringbone
multi way



Planks /
Random
one way



Planks /
Ashlar
one way



Planks /
Random
multi way



Planks /
Ashlar
multi way



Resilient
floorings



Reverse (rolls)



90°
installation
(tiles)



Same
direction
(tiles)



2-LOCK



Tongue &
Groove



Ultraloc



Glued
installation



Slabs /
Ashlar
one way



Slabs /
Random
one way



Slabs /
Ashlar
multi way



Slabs /
Random
multi way

SURFACE TREATMENTS



iQ™



PU shield



Premium PUR



Plus PUR



TopClean™



TopClean XP™



Linoleum xf2™



Essenza+



Glossy Proteco
Lacquer protection
for wood floorings



Matt Proteco
Lacquer protection
for wood floorings



Wax oiled Proteco
protection for
wood floorings



Glossy Sports Lacquer protection
for wooden sports floorings



FORMS OF DELIVERY LOGISTICS

Carpet floorings						
	Tiles	Planks	Broadloom	Rugs	Woven	Custom made
Resilient floorings						
	Compact floor covering in rolls	Acoustic floor covering in rolls	Floor covering in tiles	Floor covering in planks	Wall covering in rolls	Stair floor covering
Hard floorings						
	3-strip (3S)	2-strip (2S)	Plank (P)	Basket weave	Big block	Small block

CERTIFICATES

Cradle to Cradle® Bronze certificate	Cradle to Cradle® Silver certificate	Cradle to Cradle® Gold certificate	GUI Gold Plus logo - Indoor air quality certification	GUI Gold logo - Indoor air quality certification	GUI Basic logo - Indoor air quality certification	GUI logo - suitable for allergy sufferers certification
GUT - Environmental product label	BRE - Environmental award label	CRI - Green Label Plus	Yarn from Aquafil S.P.A. a yarn made from 100% regenerated content	Certified company for Quality Management System ISO 9001 & Environmental Management System ISO 14001	Trilogy Yarn Concept - DESSO engineered Indoor Air Quality construction (AirMaster®)	Information on the emissions levels of volatile compounds in indoor air which may pose a risk of toxicity by inhalation

SUSTAINABILITY CREDENTIALS

VOC emission ≤ 10 µg/m³	VOC emission ≤ 100 µg/m³	Phthalate-free	Biocide-free	Non PVC	Recyclable	Recycled Content	Renewable Resources	Natural Ingredients	ReStart® Ready
Material Health Statement	Environmental Product Declarations	Environmental Product Declarations							



■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett Belux Sprl – Tel. +32 16 35 98 80 ■ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11
 ■ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ■ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ■ **Germany:** Tarkett Holding GmbH – Tel. +49 62 33 810 ■ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340
 ■ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett BV – Tel. +31 416 685 491 ■ **Norway:** Tarkett AS – Tel. +47 32 20 92 00
 ■ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ■ **Spain:** Tarkett Floors S.L. – Tel. +34 91 358 00 35 ■ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH – Tel. +41 043 233 79 24
 ■ **Turkey:** Tarkett Aspen – Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220
 ■ **Czech Republic:** Tarkett org. složka – Tel. +420 271 001 600 ■ **Hungary:** Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +36 1 437 8150 ■ **Poland:** Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231
 ■ **Russian Federation:** ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett Polska, organizačná zložka – Tel. +421 2 48291 317 ■ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21
 ■ **Ukraine:** Tarkett UA – Tel. +38 (0) 44 35 45 621 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 5312 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38
 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ **India:** Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3793 – New Delhi – Tel. +91 11 4352 4073
 – Mumbai – Tel. +91 22 2648 8750 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East:
 Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc.
 – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett Brasil – Tel. 55 12 3954 7108 ■ **Argentina – Chile – Uruguay:** Tarkett Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ **Bolivia – Colombia – Ecuador – Panama – Paraguay – Peru – Trinidad and Tobago – Venezuela:** Tarkett Latam – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ **Mexico / Central America:** Tarkett Mexico – Tel. +55 11 98410 9310

206003 0088 – 2022/2023

The designs and photos used in this brochure are for illustration purposes only.
 They are not contractual images and do not stand for product recommendation.
 Design: Tarkett / Photos: EVO, Studio des Plantes, En Bande Organisée, Mario Simon Lafleur,
 @bfstudioparis, Alexander van Bergen, Getty Images / 3D: TripleD / Print: Peprint

www.professionals.tarkett.com

